


Duralay LVT Multi-Fit 1,5 mm: 7,3 x 1,37 m (10 m2)

Art. nr - 114100111

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

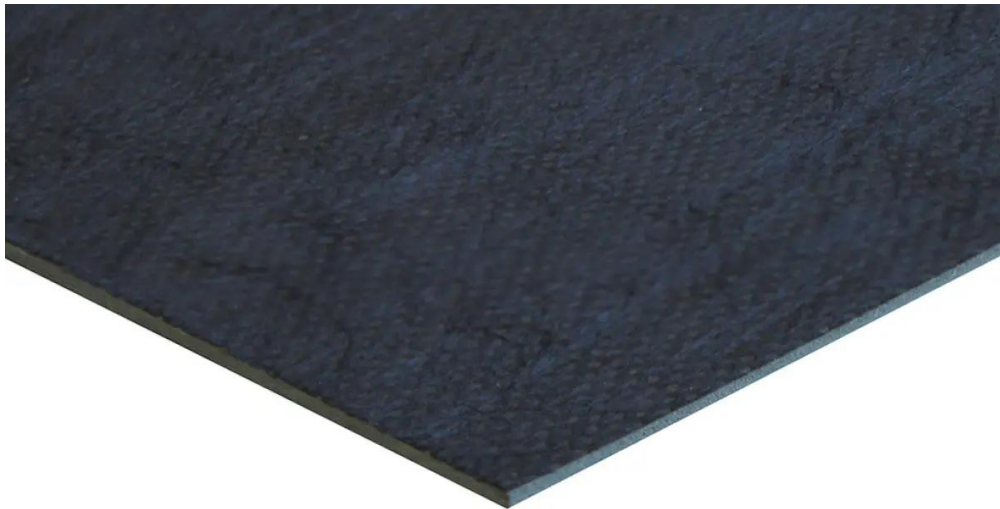

Description

Duralay LVT Multi-Fit 1.5 mm can be installed in different ways: loose lay, single stick, or double stick, depending on the requirements of the flooring above. It's suitable for carpet tiles, laminate, parquet, LVT dryback, LVT Click, and LVT Rigid. This IMO fire-retardant underlay is perfect for ships, offshore installations, hotels, and any environment where fire resistance is a must.

- Enhances sound reduction
- Improves foot comfort
- Provides an excellent underlayer, masking minor surface imperfections
- IMO fire-retardant underlay

Specifications

Floor type	Carpet tiles / Laminate / Parquet / LVT Dryback / LVT Click / LVT Rigid Click
Product weight	2500 g/m ²
Product dimensions (Length)	7.3 m
Product dimensions (Width)	1.37 m
Product dimensions in m ²	10 m ²
Sound-reducing - ΔL_{lin}	10 dB ΔL_{lin}
Sound-reducing - ΔL_{lin} - Test method	EN-ISO 10140-1 - 5:2021 / EN-ISO 717-2:2021
Base unit	Roll
Thickness	1.5 mm
Density	1667 kg/m ³
Material	Sponge rubber
Brand	Duralay
TOG rating	0.12 TOG
Thermal resistance - R-value	0.012 m ² K/W
Suitable for underfloor heating	Yes
PC (Punctual Conformability)	0.55 mm
CS	CS4
Domestic use	Yes
Project use	Yes
Laying method	Floating / double-sided gluing

Duralay LVT Multi-Fit 1,5 mm: 7,3 x 1,37 m (10 m2)

Art. nr - 114100111

estillon
WE WILL IMPROVE YOUR FLOOR

TUV certificate	Yes
DIBT certificate	Z-158.10-260
IMO certificate	Yes
Type of base floor	Fixed sand cement floor / Floating screed
Sound-reducing - ΔLw	21 dB ΔLw
Sound-reducing - ΔLw - Test method	EN-ISO 10140-1 - 5:2021 / EN-ISO 717-2:2021
Flame-retardant	Bfl-S1
RLB (Resistance to Large Ball)	1800 mm
DL (Dynamic Load)	>1000 cycles
CS/CC (Compressive Strength / Compressive Creep)	503 kPa

Duralay LVT Multi-Fit 1,5 mm: 7,3 x 1,37 m (10 m²)

Art. nr - 114100111

estillon
WE WILL IMPROVE YOUR FLOOR

