


Duralay LVT Multi-Fit 1.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114100111

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

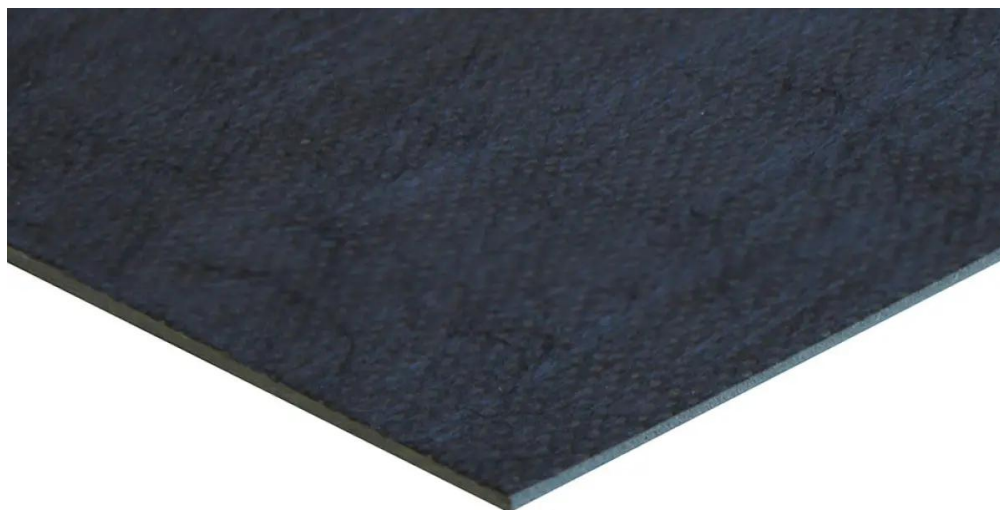

Description

Duralay LVT Multi-Fit 1.5 mm can be installed in different ways: loose lay, single stick, or double stick, depending on the requirements of the flooring above. It's suitable for carpet tiles, laminate, parquet, PVC dryback, PVC Click, and PVC Rigid. This IMO fire-retardant underlay is perfect for ships, offshore installations, hotels, and any environment where fire resistance is a must. - Enhances sound reduction - Improves foot comfort - Provides an excellent underlayer, masking minor surface imperfections - IMO fire-retardant underlay

Duralay LVT Multi-Fit 1.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114100111

estillon
WE WILL IMPROVE YOUR FLOOR

Specifications

Floor type	Carpet tiles / Laminate / Parquet / PVC Dryback / PVC Click / PVC Rigid
Base unit	Roll
Product weight	2500 g/m ²
Product dimensions (Length)	7.3 m
Product dimensions in m ²	10 m ²
Thickness	1.5 mm
Density	1667 kg/m ³
Material	Sponge rubber
Brand	Duralay
TOG rating	0.12 TOG
Suitable for underfloor heating	Yes
PC (Punctual Conformability)	0.55 mm
CS	CS4
CS/CC (compressive Strength / Compressive Creep)	503
CS/CC (compressive Strength / Compressive Creep) - unit	kPa
Domestic use	Yes
Project use	Yes
Laying method	Floating / double-sided gluing
Product dimensions (Width)	1.37 m

Duralay LVT Multi-Fit 1.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114100111

Product dimensions (Unit)	m ²
Type of base floor	Fixed sand cement floor / Floating screed
Thermal resistance - R-value (Test method: ISO 8302)	0.012 m ² K/W
Sound-reducing (Test method: NEN-EN ISO 717-2)	10
Sound-reducing - unit	Llin
Sound-reducing Lw (Test method: NEN-EN ISO 717-2)	21 dB Lw
Flame-retardant (Test method: EN 13501-1)	Bfl-S1
RLB (Resistance to Large Ball)	1800 mm
DL (Dynamic Load)	>1000 cycles
CS/CC (Compressive Strength / Compressive Creep)	503
CS/CC (Compressive Strength / Compressive Creep) - unit	kPa
Laying direction	Perpendicular to the installation direction of the upper floor. Prevent the seams of the underlay and the upper floor from aligning.
Suitable for stair installation	Yes
IMO certificate	Yes
TUV certificate	Yes

Duralay LVT Multi-Fit 1.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114100111

estillon
WE WILL IMPROVE YOUR FLOOR

