


# Duralay LVT Low-Grab 1.5 mm: 10 x 1 m (10 m<sup>2</sup>)

Art. nr - 114100121

**estillon**  
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

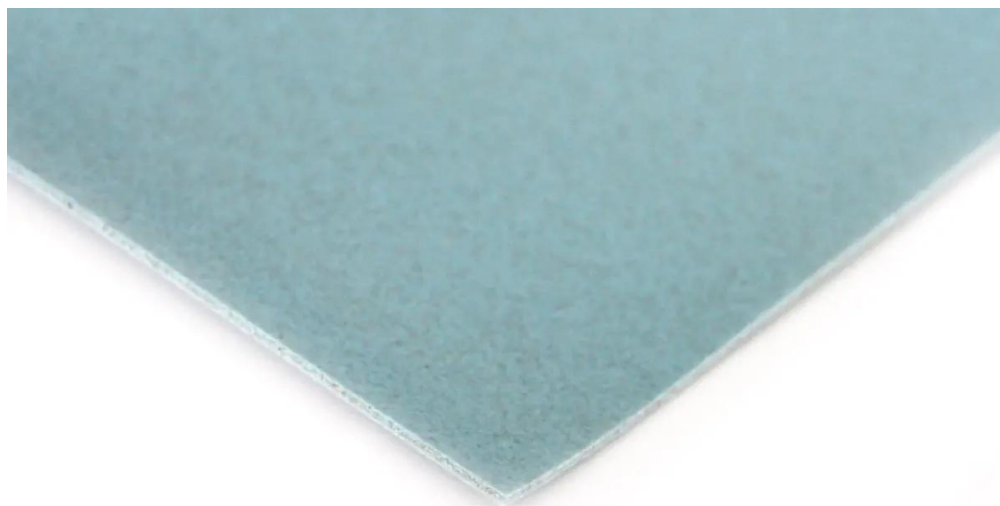

## Description

Duralay LVT Low-Grab Underlay is a versatile flooring solution designed for PVC Click installations. The setup process is quick, clean, and straightforward; the underlay is laid loosely over the existing floor. The new floor is positioned and pressed onto the 'low-grab' layer. Suitable for PVC Click floors. Unique anti-slip backing. Significantly reduced installation times and costs. Quick to install and easy to handle. Preparation time for the underlay is greatly reduced.

# Duralay LVT Low-Grab 1.5 mm: 10 x 1 m (10 m<sup>2</sup>)

Art. nr - 114100121

## Specifications

Floor type	PVC Click
Base unit	Roll
Product weight	1500 g/m <sup>2</sup>
Product dimensions (Length)	10 m
Product dimensions in m <sup>2</sup>	10 m <sup>2</sup>
Thickness	1.5 mm
Density	1000 kg/m <sup>3</sup>
Material	Sponge rubber
Brand	Duralay
TOG rating	0.10 TOG
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
PC (Punctual Conformability)	0.62 mm
CS	CS4
CS/CC (compressive Strength / Compressive Creep)	420
CS/CC (compressive Strength / Compressive Creep) - unit	kPa
Domestic use	Yes
Project use	Yes
Laying method	Floating

# Duralay LVT Low-Grab 1.5 mm: 10 x 1 m (10 m<sup>2</sup>)

Art. nr - 114100121

Product dimensions (Width)	1 m
Product dimensions (Unit)	m <sup>2</sup>
Type of base floor	Fixed sand cement floor / Floating screed
Thermal resistance - R-value (Test method: ISO 8302)	0.010 m <sup>2</sup> K/W
Sound-reducing Lw (Test method: NEN-EN ISO 717-2)	17 dB Lw
Flame-retardant (Test method: EN 13501-1)	Bfl-S1
RWS (Radiated Walking Sound (reduction))	up to 6 %
RLB (Resistance to Large Ball)	650 mm
DL (Dynamic Load)	>100,000 cycles
CS/CC (Compressive Strength / Compressive Creep)	420
CS/CC (Compressive Strength / Compressive Creep) - unit	kPa
Laying direction	Perpendicular to the laying direction of the top floor. Prevent the seams of the underlay and the top floor from aligning.

# Duralay LVT Low-Grab 1.5 mm: 10 x 1 m (10 m<sup>2</sup>)

Art. nr - 114100121

