


# Duralay LVT Low-Grab 1.5 mm: 10 x 1 m (10 m<sup>2</sup>)

Art. nr - 114100121

**estillon**  
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

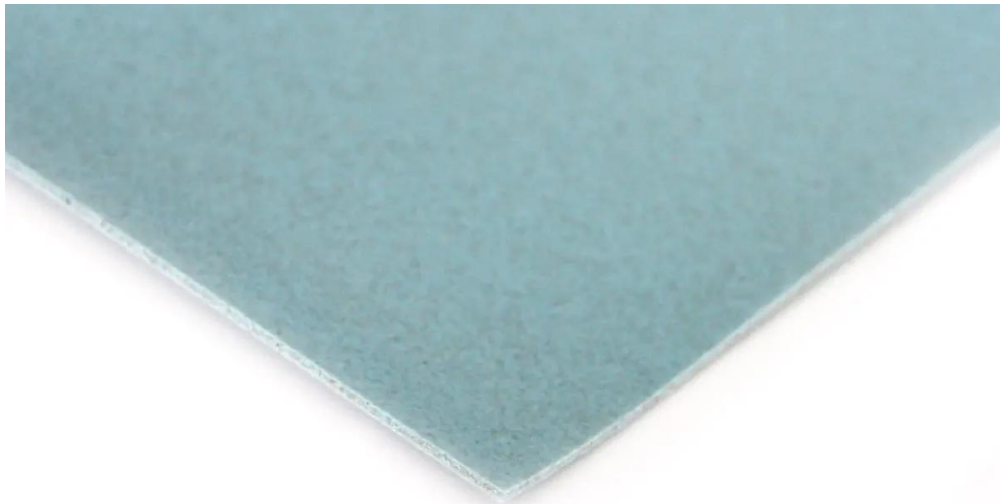

## Description

Duralay LVT Low-Grab Underlay is a versatile flooring solution designed for LVT Click installations. The setup process is quick, clean, and straightforward; the underlay is laid loosely over the existing floor. The new floor is positioned and pressed onto the 'low-grab' layer. Suitable for LVT Click floors. Unique anti-slip backing. Significantly reduced installation times and costs. Quick to install and easy to handle. Preparation time for the underlay is greatly reduced.

# Duralay LVT Low-Grab 1.5 mm: 10 x 1 m (10 m<sup>2</sup>)

Art. nr - 114100121

## Specifications

|  |                         |
|--|-------------------------|
| Floor type                                       | LVT Click               |
| Product weight                                   | 1500 g/m <sup>2</sup>   |
| Product dimensions (Length)                      | 10 m                    |
| Product dimensions Width (Unit)                  | m                       |
| Product dimensions in m2                         | 10 m <sup>2</sup>       |
| Base unit  | Roll                    |
| Thickness  | 1.5 mm                  |
| Density  | 1000 kg/m <sup>3</sup>  |
| Material   | Sponge rubber           |
| Brand  | Duralay                 |
| Thermal resistance - R-value                     | 0.01 m <sup>2</sup> K/W |
| TOG rating                                       | 0.1 TOG                 |
| Suitable for underfloor heating                  | Yes                     |
| Suitable for floor cooling                       | Yes                     |
| PC (Punctual Conformability)                     | 0.62 mm                 |
| CS   | CS4                     |
| CS/CC (compressive Strength / Compressive Creep) | 420 kPa                 |
| Domestic use                                     | Yes                     |
| Project use                                      | Yes                     |

# Duralay LVT Low-Grab 1.5 mm: 10 x 1 m (10 m<sup>2</sup>)

Art. nr - 114100121

|  |   |
|--|---|
| Laying method  | Floating  |
| Product dimensions (Unit)                              | m <sup>2</sup>  |
| Type of base floor                                     | Fixed sand cement floor / Floating screed   |
| Sound-reducing - Lw                                    | 17 dB Lw  |
| Flame-retardant  | Bfl-S1  |
| RWS (Radiated Walking Sound (reduction))               | up to 6 %   |
| RWS (Radiated Walking Sound (reduction)) - Test Method | EPLF WD 021029-5  |
| RLB (Resistance to Large Ball)                         | 650 mm  |
| DL (Dynamic Load)                                      | >100,000 cycles   |
| CS/CC (Compressive Strength / Compressive Creep)       | 420 kPa   |
| Laying direction                                       | Perpendicular to the laying direction of the top floor. Avoid aligning the seams of the underlay and the top floor. |

Duralay LVT Low-Grab 1.5 mm: 10 x 1 m (10 m²)

Art. nr - 114100121

