


Duralay LVT Low-Grab 1.5 mm: 10 x 1 m (10 m²)

Art. nr - 114100121

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

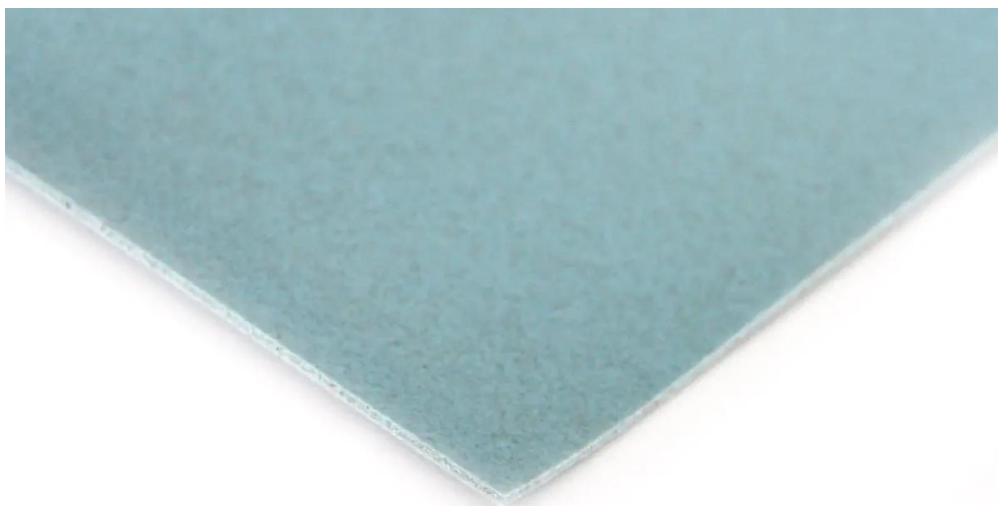

Description

Duralay LVT Low-Grab Underlay is a versatile flooring solution designed for LVT Click installations. The setup process is quick, clean, and straightforward; the underlay is laid loosely over the existing floor. The new floor is positioned and pressed onto the 'low-grab' layer. Suitable for LVT Click floors. Unique anti-slip backing. Significantly reduced installation times and costs. Quick to install and easy to handle. Preparation time for the underlay is greatly reduced.

Duralay LVT Low-Grab 1.5 mm: 10 x 1 m (10 m²)

Art. nr - 114100121

estillon
WE WILL IMPROVE YOUR FLOOR

Specifications

Floor type	LVT Click
Product weight	1500 g/m ²
Product dimensions (Length)	10 m
Product dimensions (Width)	1 m
Product dimensions in m2	10 m ²
Base unit	Roll
Thickness	1.5 mm
Density	1000 kg/m ³
Material	Sponge rubber
Brand	Duralay
TOG rating	0.1 TOG
Thermal resistance - R-value	0.01 m ² K/W
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
PC (Punctual Conformability)	0.62 mm
CS	CS4
CS/CC (compressive Strength / Compressive Creep)	420 kPa
Domestic use	Yes
Project use	Yes
Laying method	Floating
Type of base floor	Fixed sand cement floor / Floating screed

Duralay LVT Low-Grab 1.5 mm: 10 x 1 m (10 m²)

Art. nr - 114100121

estillon
WE WILL IMPROVE YOUR FLOOR

Sound-reducing - ΔLw	17 dB ΔLw
Flame-retardant	Bfl-S1
RWS (Radiated Walking Sound (reduction))	up to 6 %
RWS (Radiated Walking Sound (reduction)) - Test Method	EPLF WD 021029-5
RLB (Resistance to Large Ball)	650 mm
DL (Dynamic Load)	>100,000 cycles
CS/CC (Compressive Strength / Compressive Creep)	420 kPa

Duralay LVT Low-Grab 1.5 mm: 10 x 1 m (10 m²)

Art. nr - 114100121

estillon
WE WILL IMPROVE YOUR FLOOR

