


Duralay LVT Dry-Back 1,8 mm: 6,5 x 1 m (6,5 m²)

Art. nr - 114100122

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

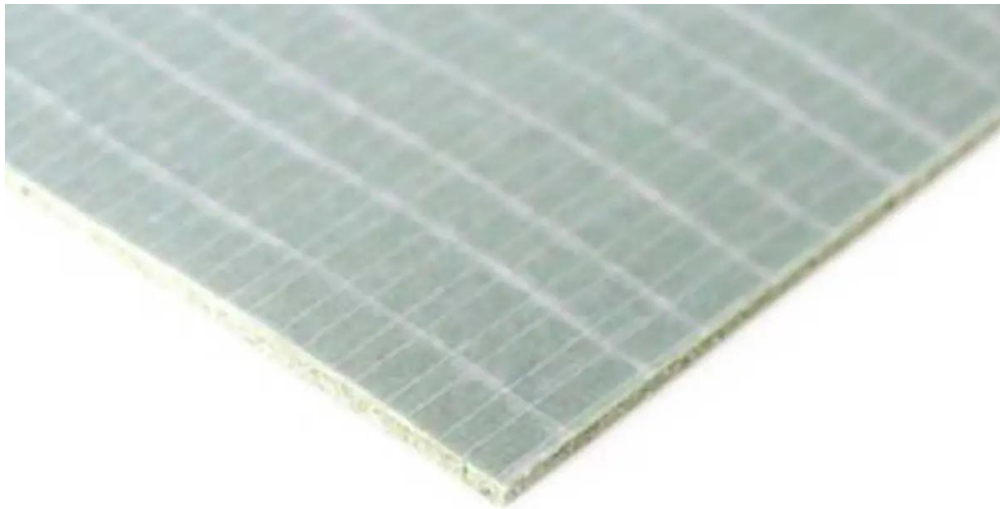

Description

Duralay LVT Dry-Back Underlay is a versatile solution designed for installing 'dry back' LVT flooring. It significantly reduces the preparation time of the subfloor. Installation is quick, clean, and easy. The underlay is laid loose over the existing floor. The film is peeled back to expose the adhesive, after which the new floor is positioned onto the 'high grip' layer of the underlay. - Suitable for 'dry back' LVT flooring - Unique self-adhesive backing - Significantly shorter installation times and costs - Quick to install, easy to handle - Preparation time for the subfloor is greatly reduced

Duralay LVT Dry-Back 1,8 mm: 6,5 x 1 m (6,5 m²)

Art. nr - 114100122

estillon
WE WILL IMPROVE YOUR FLOOR

Specifications

| | |
|--------------------------------------------------|-------------------------------------------|
| Floor type | LVT Dryback |
| Thickness | 1.8 mm |
| Type of base floor | Fixed sand cement floor / Floating screed |
| Domestic use | Yes |
| Project use | Yes |
| PC (Punctual Conformability) | 0.55 mm |
| CS | CS4 |
| CS/CC (compressive Strength / Compressive Creep) | 450 kPa |
| Product weight | 2600 g/m ² |
| Product dimensions (Length) | 6.5 m |
| Product dimensions (Width) | 1 m |
| Product dimensions in m ² | 6.5 m ² |
| Sound-reducing - ΔL_w | 15 dB ΔL_w |
| TOG rating | 0.1 TOG |
| Thermal resistance - R-value | 0.01 m ² K/W |
| RWS (Radiated Walking Sound (reduction)) | up to 6 % |
| RLB (Resistance to Large Ball) | ~ 750 mm |
| DL (Dynamic Load) | >100,000 cycles |
| Suitable for underfloor heating | Yes |
| Suitable for floor cooling | Yes |
| Flame-retardant | Bfl-S1 |

Duralay LVT Dry-Back 1,8 mm: 6,5 x 1 m (6,5 m²)

Art. nr - 114100122

estillon
WE WILL IMPROVE YOUR FLOOR

| | |
|--------------------------------------------------|------------------------|
| Density | 1444 kg/m ³ |
| Material | Sponge rubber |
| Brand | Duralay |
| Laying method | Floating |
| CS/CC (Compressive Strength / Compressive Creep) | 450 kPa |

Duralay LVT Dry-Back 1,8 mm: 6,5 x 1 m (6,5 m2)

Art. nr - 114100122

estillon
WE WILL IMPROVE YOUR FLOOR

