


# Duralay LVT Dry-Back 1,8 mm: 6,5 x 1 m (6,5 m<sup>2</sup>)

Art. nr - 114100122

**estillon**  
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

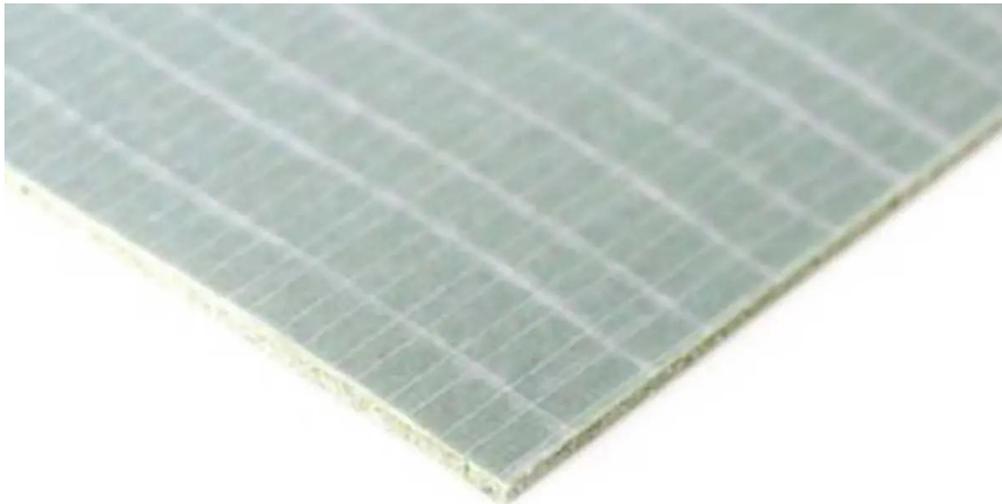

## Description

Duralay LVT Dry-Back Underlay is a versatile solution designed for installing 'dry back' LVT flooring. It significantly reduces the preparation time of the subfloor. Installation is quick, clean, and easy. The underlay is laid loose over the existing floor. The film is peeled back to expose the adhesive, after which the new floor is positioned onto the 'high grip' layer of the underlay. - Suitable for 'dry back' LVT flooring - Unique self-adhesive backing - Significantly shorter installation times and costs - Quick to install, easy to handle - Preparation time for the subfloor is greatly reduced

# Duralay LVT Dry-Back 1,8 mm: 6,5 x 1 m (6,5 m<sup>2</sup>)

Art. nr - 114100122

**estillon**  
WE WILL IMPROVE YOUR FLOOR

## Specifications

|  |   |
|--|---|
| Floor type                                       | LVT Dryback                               |
| Product weight                                   | 2600 g/m <sup>2</sup>                     |
| Product dimensions (Length)                      | 6.5 m                                     |
| Product dimensions (Width)                       | 1 m                                       |
| Product dimensions in m <sup>2</sup>             | 6.5 m <sup>2</sup>                        |
| Base unit  | Roll                                      |
| Thickness  | 1.8 mm                                    |
| Density  | 1444 kg/m <sup>3</sup>                    |
| Material   | Sponge rubber                             |
| Brand  | Duralay                                   |
| TOG rating                                       | 0.1 TOG                                   |
| Thermal resistance - R-value                     | 0.01 m <sup>2</sup> K/W                   |
| Suitable for underfloor heating                  | Yes                                       |
| Suitable for floor cooling                       | Yes                                       |
| PC (Punctual Conformability)                     | 0.55 mm                                   |
| CS   | CS4                                       |
| CS/CC (compressive Strength / Compressive Creep) | 450 kPa                                   |
| Domestic use                                     | Yes                                       |
| Project use                                      | Yes                                       |
| Laying method                                    | Floating                                  |
| Type of base floor                               | Fixed sand cement floor / Floating screed |

# Duralay LVT Dry-Back 1,8 mm: 6,5 x 1 m (6,5 m<sup>2</sup>)

Art. nr - 114100122

**estillon**  
WE WILL IMPROVE YOUR FLOOR

|  |                   |
|--|-------------------|
| Sound-reducing - $\Delta Lw$                     | 15 dB $\Delta Lw$ |
| Flame-retardant                                  | Bfl-S1            |
| RWS (Radiated Walking Sound (reduction))         | up to 6 %         |
| RLB (Resistance to Large Ball)                   | ~ 750 mm          |
| DL (Dynamic Load)                                | >100,000 cycles   |
| CS/CC (Compressive Strength / Compressive Creep) | 450 kPa           |

# Duralay LVT Dry-Back 1,8 mm: 6,5 x 1 m (6,5 m2)

Art. nr - 114100122

**estillon**  
WE WILL IMPROVE YOUR FLOOR

