


Sonixx Resilient 250 2.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114107816

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

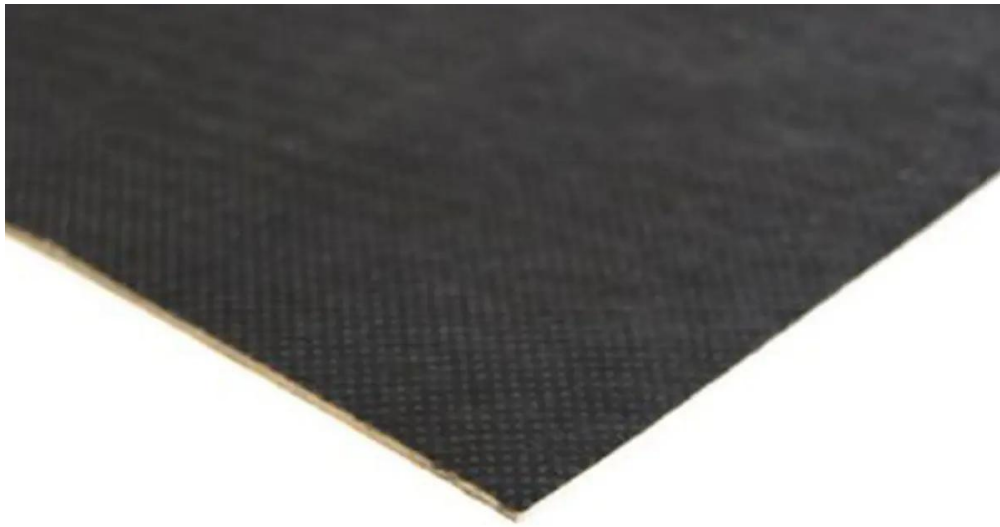

Description

Sonixx® Resilient 250 is a premium acoustic resilient underlayment designed to significantly reduce impact noise. It can be used as a soft flooring material or as an acoustic underlay. Suitable for carpet, carpet tiles, ceramic tiles, PVC Dryback, PVC Click, vinyl, and linoleum.

Sonixx Resilient 250 2.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114107816

estillon
WE WILL IMPROVE YOUR FLOOR

Specifications

Floor type	Carpet / Carpet tiles / Ceramic tiles / PVC Dryback / PVC Click / Vinyl / Linoleum
Base unit	Roll
Product weight	2400 g/m ²
Product dimensions (Length)	7.3 m
Product dimensions in m ²	10 m ²
Thickness	2.5 mm
Density	960 kg/m ³
Material	Sponge rubber
Brand	Sonixx
TOG rating	0.23 TOG
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
Domestic use	Yes
Laying method	Floating / double-sided gluing
Product dimensions (Width)	1.37 m
Product dimensions (Unit)	m ²
Type of base floor	Fixed sand cement floor / Floating screed
Thermal resistance - R-value (Test method: ISO 8302)	0.023 m ² K/W

Sonixx Resilient 250 2.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114107816

Sound-reducing Lw (Test method: NEN-EN ISO 717-2)	19 dB Lw
Flame-retardant (Test method: EN 13501-1)	Bfl-S1
Laying direction	Perpendicular to the grain direction of the upper floor. Prevent the joints of the underlay and the upper floor from coinciding.
Suitable for stair installation	Yes

Sonixx Resilient 250 2.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114107816

