
# Sonixx Resilient 250 2.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114107816

Scan this QR code to view this product on our website.

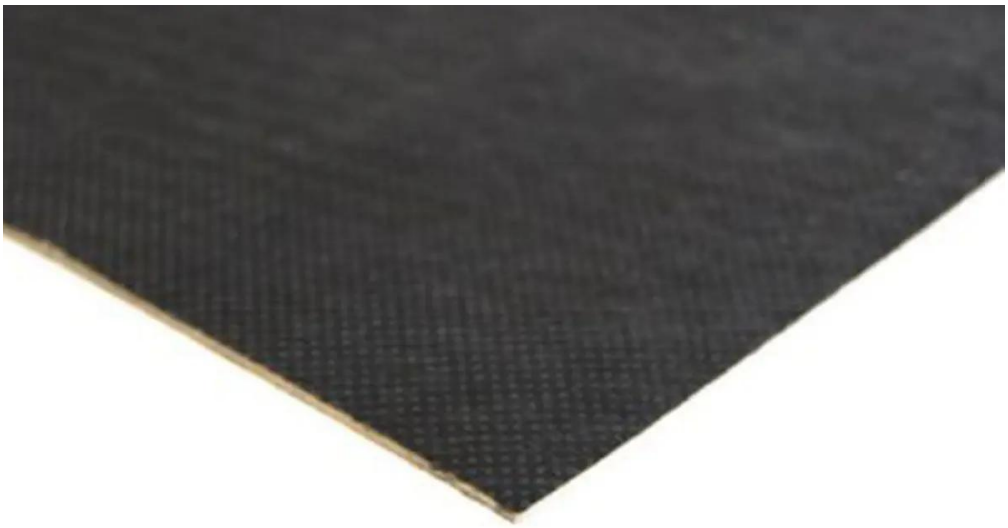

## Description

Sonixx® Resilient 250 is a premium acoustic resilient underlayment designed to significantly reduce impact noise. It can be used as a soft flooring material or as an acoustic underlay. Suitable for carpet, carpet tiles, ceramic tiles, LVT Dryback, LVT Click, vinyl, and linoleum.

# Sonixx Resilient 250 2.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114107816

## Specifications

| | |
|---|---|
| Floor type | Carpet / Carpet tiles / Ceramic tiles / LVT Dryback / LVT Click / Vinyl / Linoleum |
| Thickness | 2.5 mm |
| Type of base floor | Fixed sand cement floor / Floating screed |
| Domestic use | Yes |
| Product weight | 2400 g/m² |
| Product dimensions (Length) | 7.3 m |
| Product dimensions (Width) | 1.37 m |
| Product dimensions in m2 | 10 m² |
| Sound-reducing - ΔLw | 19 dB ΔLw |
| TOG rating | 0.23 TOG |
| Thermal resistance - R-value | 0.023 m² K/W |
| DIBT certificate | Z-158.10-260 |
| Suitable for underfloor heating | Yes |
| Suitable for floor cooling | Yes |
| Fire classification | Bfl-s1 |
| Density | 960 kg/m³ |
| Material | Sponge rubber |
| Brand | Sonixx |
| Laying method | Floating / double-sided gluing |

# Sonixx Resilient 250 2.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114107816

| | |
|---|---|
| Hospitality Collection | Yes |

# Sonixx Resilient 250 2.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114107816

