


Sonixx Resilient 250 2,5 mm: 7,3 x 1,37 m (10 m2)

Art. nr - 114107816

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

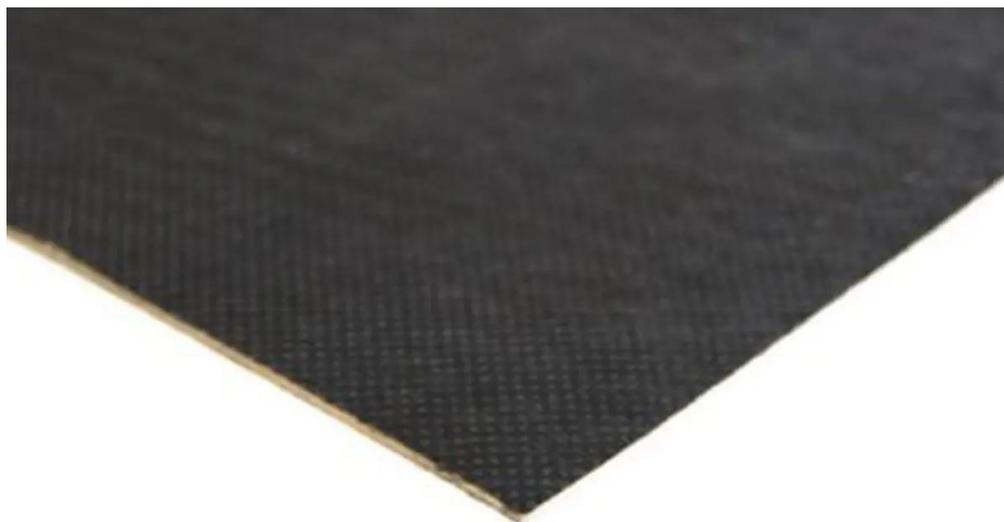

Description

Sonixx® Resilient 250 is a premium acoustic resilient underlayment designed to significantly reduce impact noise. It can be used as a soft flooring material or as an acoustic underlay. Suitable for carpet, carpet tiles, ceramic tiles, LVT Dryback, LVT Click, vinyl, and linoleum.

Sonixx Resilient 250 2,5 mm: 7,3 x 1,37 m (10 m2)

Art. nr - 114107816

estillon
WE WILL IMPROVE YOUR FLOOR

Specifications

Floor type	Carpet / Carpet tiles / Ceramic tiles / LVT Dryback / LVT Click / Vinyl / Linoleum
Thickness	2.5 mm
Type of base floor	Fixed sand cement floor / Floating screed
Domestic use	Yes
Product weight	2400 g/m ²
Product dimensions (Length)	7.3 m
Product dimensions (Width)	1.37 m
Product dimensions in m2	10 m ²
Sound-reducing - ΔLw	19 dB ΔLw
TOG rating	0.23 TOG
Thermal resistance - R-value	0.023 m ² K/W
DIBT certificate	Z-158.10-260
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
Flame-retardant	Bfl-S1
Density	960 kg/m ³
Material	Sponge rubber
Brand	Sonixx
Laying method	Floating / double-sided gluing

Sonixx Resilient 250 2,5 mm: 7,3 x 1,37 m (10 m2)

Art. nr - 114107816



Hospitality Collection	Yes
------------------------	-----

Sonixx Resilient 250 2,5 mm: 7,3 x 1,37 m (10 m²)

Art. nr - 114107816

estillon
WE WILL IMPROVE YOUR FLOOR

