


# Soundstop Plus 2 mm: 15 x 1 m (15 m<sup>2</sup>)

Art. nr - 68832

**estillon**  
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

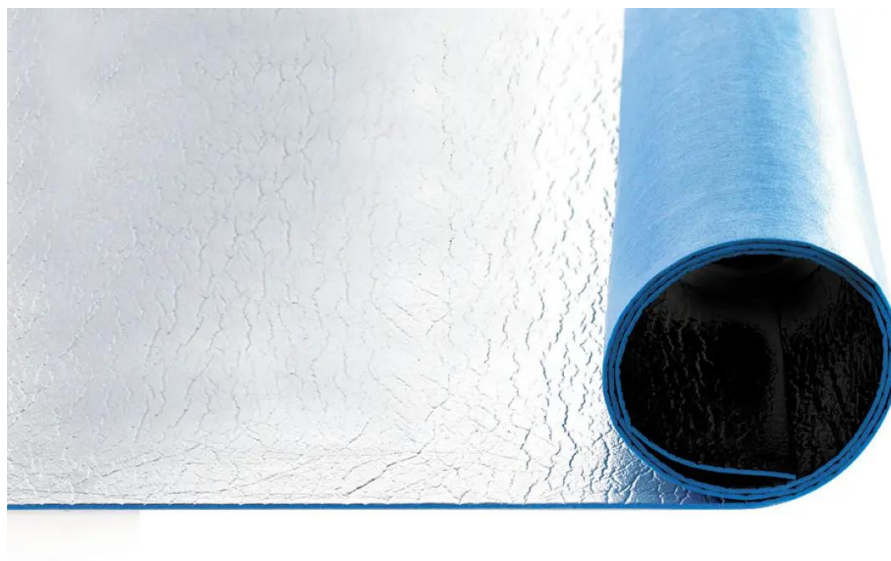

## Installation instruction

- Allow the underfloor, like the top floor to be installed, to acclimate in the closed packaging for at least 24 hours in the room where it will be installed.
- The ideal humidity for installation is between 50–70% and the working temperature is 15–20 degrees Celsius.
- Work cleanly and ensure that the substrate is completely free of debris, dust-free, and dry before installation.
- For cutting the underfloor, we recommend a standard trapezium break-off knife.
- An underfloor cannot prevent the movement of a floor.
- We advise always following the installation advice of the floor supplier.

### Top side

# Soundstop Plus 2 mm: 15 x 1 m (15 m<sup>2</sup>)

Art. nr - 68832



N/A (except for item 68832 Soundstop Plus 2 mm – Floating installation with the moisture barrier facing upwards. Tape the seams).

## Disclaimer

If the installation instructions are not followed, Estillon cannot be held liable for damage and/or claims arising from incorrect installation. If in doubt, always consult your supplier.