
Sonixx Resilient 250 2.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114107816

Scan this QR code to view this product on our website.

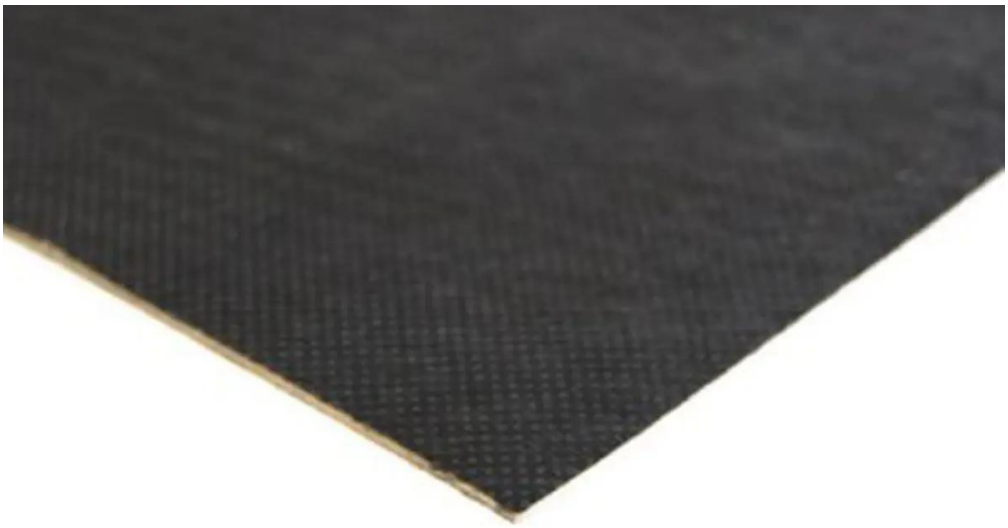

Installation instruction

Installation methods:

click here: https://www.interfloor.com/installation-methods/

- Be aware of the risk of complaints when using a tackifier/anti-slip adhesive instead of a full double-bonding method, where both the subfloor and the backing of the carpet are fully adhered with a universal carpet adhesive.
- A tackifier does not provide the same dimensional stability, adhesion strength, and durability as a double-bonding system.
- In high-traffic applications, we advise against using a tackifier due to the risk of inadequate adhesion, premature wear, and functional failure of the flooring system.

- Always follow the installation advice of the carpet manufacturer and adhesive manufacturer to avoid issues during installation.

If the installation guidelines are not followed, Estillon cannot be held liable for any damage and/or claims resulting from improper installation. In case of doubt, always consult your supplier.