


# Floorfixx edge strips 5.2 mm: 82 x 6.5 cm

Art. nr - 62094

**estillon**  
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

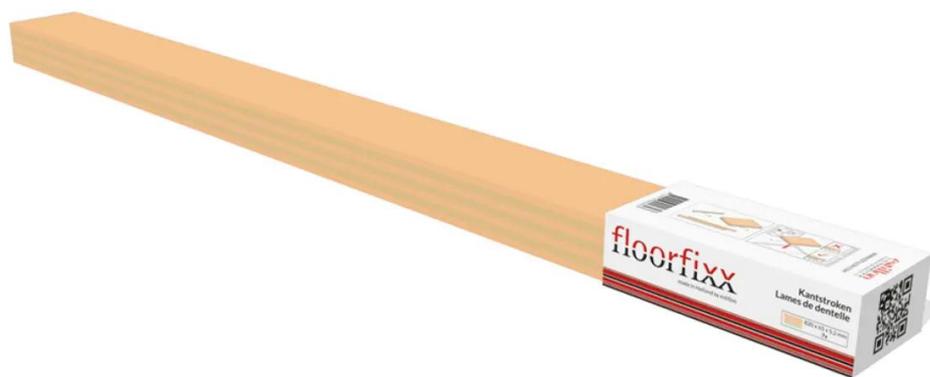

## Description

Floorfixx edge strips are designed for use with Floorfixx smart underlay systems. They are intended to be placed under the edge of the first row, so you don't need to cut the Floorfixx panels. The edge strips can also be used as filler strips where necessary.

- Size: 820 x 65 x 5.2 mm
- Pack of 7 pieces

# Floorfixx edge strips 5.2 mm: 82 x 6.5 cm

Art. nr - 62094

## Specifications

Floor type	LVT Dryback / LVT Click / Vinyl / Carpet tiles / LVT Rigid with underlayment / Linoleum
Product weight	4881 g/m <sup>2</sup> (10% margin)
Product dimensions (Length)	820 mm (10% margin)
Product dimensions (Width)	65 mm (10% margin)
Sound-reducing - $\Delta L_{lin}$	10 dB $\Delta L_{lin}$
Sound-reducing - $\Delta L_{lin}$ - Test method	EN 13501-1:2007 + A1:2009
Base unit	Bundle
Thickness	8 mm (10% margin)
Density	610 kg/m <sup>3</sup> (10% margin)
Material	Top layer: 3 mm MDF Bottom layer: 3 mm MDF & 2.2 mm XPS foam
Brand	Floorfixx
Formaldehyde (Test method: EN 120)	E-1
Leveling capacity	2 mm over 2 m length
Thermal resistance - R-value	0.123 m <sup>2</sup> K/W
TOG rating	1.23 TOG
Suitable for underfloor heating	Yes
Domestic use	Yes
Laying method	Floating
TUV certificate	Yes

# Floorfixx edge strips 5.2 mm: 82 x 6.5 cm

Art. nr - 62094

Type of base floor	Wooden floor / Fixed sand cement floor / Floating screed
Sound-reducing - $\Delta L_w$	20 dB $\Delta L_w$
Sound-reducing - $\Delta L_w$ - Test method	EN 13501-1:2007 + A1:2009
Flame-retardant	Efl-S1

# Floorfixx edge strips 5.2 mm: 82 x 6.5 cm

Art. nr - 62094

