


Floorfixx regular 9 mm: 120 cm x 60 cm (2,88 m²)

Art. nr - 62200

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

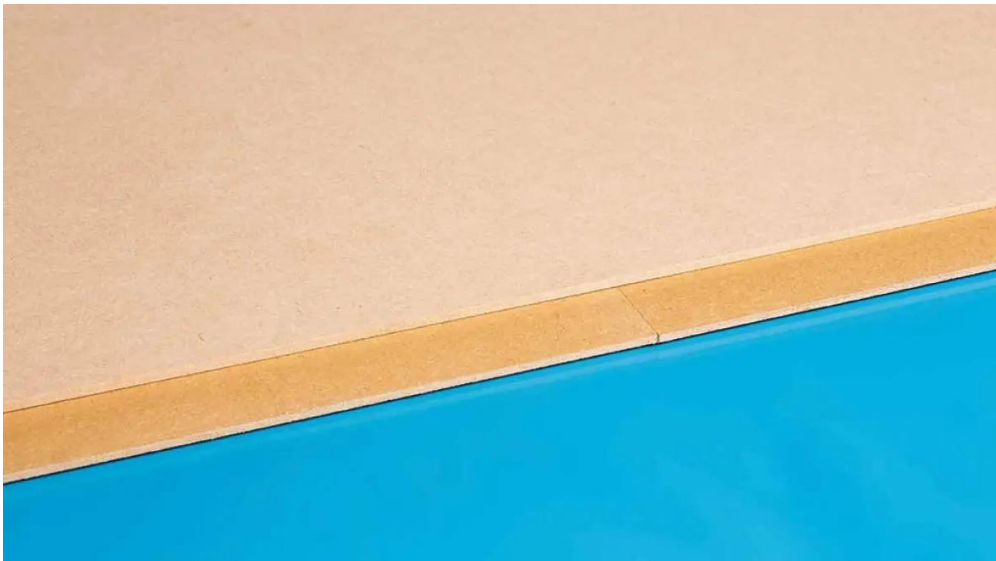

Description

Floorfixx regular offers an efficient solution for creating a new, insulating, and level floor base. It is ideal for renovating poor substrate floors and can support overlay materials with a minimum thickness of 2 mm, such as linoleum, resilient vinyl, LVT, carpet, and carpet tiles.

- The system requires no waiting times and is immediately load-bearing
- It provides dust-free and dry leveling, is easy to install
- Smooths out unevenness for maximum stability
- Guarantees a 100% smooth base for quick installation
- It is designed to isolate impact sound
- Meets the 10dB standard set by the VvE

Floorfixx regular 9 mm: 120 cm x 60 cm (2,88 m²)

Art. nr - 62200



- Levels up to 3 mm over a length of 1 meter

Floorfixx regular 9 mm: 120 cm x 60 cm (2,88 m²)

Art. nr - 62200

estillon
WE WILL IMPROVE YOUR FLOOR

Specifications

Floor type	LVT Dryback / LVT Click / Carpet tiles / Linoleum / Vinyl / LVT Rigid with underlayment
Product weight	5590 g/m ² (10% margin)
Product dimensions (Length)	120 cm (10% margin)
Product dimensions (Width)	60 cm (10% margin)
Product dimensions in m ²	2.88 m ²
Sound-reducing - ΔLlin	11 dB ΔLlin
Sound-reducing - ΔLlin - Test method	EN-ISO 10140-1 - 5:2021 / EN-ISO 717-2:2013
Base unit	Pack
Thickness	9 mm (10% margin)
Density	621 kg/m ³ (10% margin)
Material	Top layer: 4 mm MDF Bottom layer: 3 mm MDF & 2.2 mm XPS foam
Brand	Floorfixx
Formaldehyde (Test method: EN 120)	E-1
Leveling capacity	3 mm over 1 m length
Thermal resistance - R-value	0.133 m ² K/W
TOG rating	1.33 TOG
Thermal resistance - Test method	ISO 8302
VOC label	A
Suitable for underfloor heating	Yes

Floorfixx regular 9 mm: 120 cm x 60 cm (2,88 m²)

Art. nr - 62200

estillon
WE WILL IMPROVE YOUR FLOOR

PC (Punctual Conformability)	12
CS	CS2
CS/CC (compressive Strength / Compressive Creep)	251 kPa
Domestic use	Yes
Project use	Yes
Laying method	Floating
DIBT certificate	Z-158.10-129
TUV certificate	Yes
Type of base floor	Wooden floor / Fixed sand cement floor / Floating screed
Bending strength (Test method: EN 310)	40 N/mm ²
Wheelchair load (Test method: EN 985)	Suitable
Sound-reducing - ΔLw	22 dB ΔLw
Sound-reducing - ΔLw - Test method	EN-ISO 10140-1 - 5:2021 / EN-ISO 717-2:2013
Flame-retardant	Bfl-S1
Flame-retardant - Test method	EN 13501-1
CS/CC (Compressive Strength / Compressive Creep)	251 kPa

Floorfixx regular 9 mm: 120 cm x 60 cm (2,88 m²)

Art. nr - 62200

estillon
WE WILL IMPROVE YOUR FLOOR

