
Floorfixx Regular 9 mm: 120 x 60 cm (2.88 m²)

Art. nr - 62200

Scan this QR code to view this product on our website.

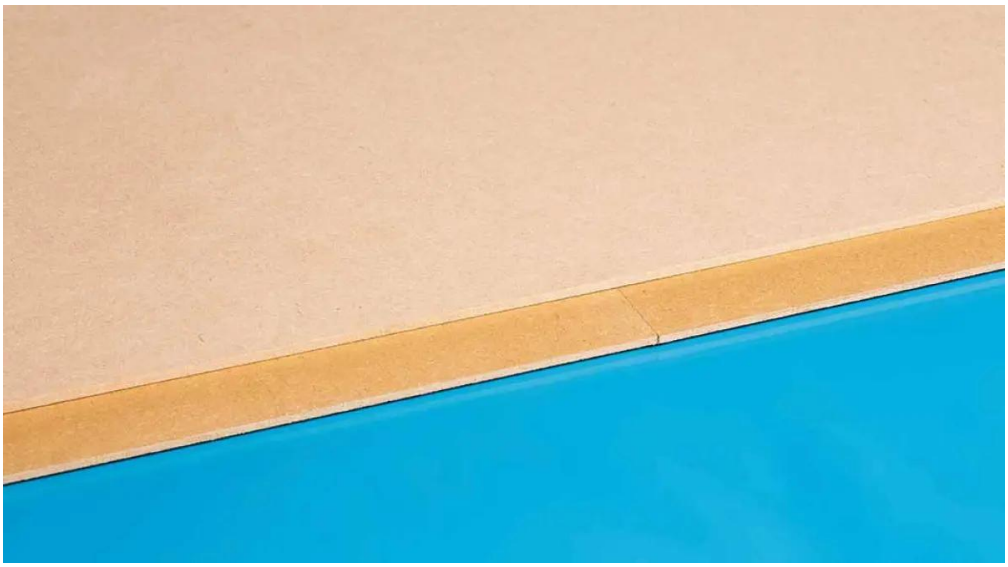

Description

The Floorfixx Regular underlay is 9 mm thick and measures 120 x 60 cm per panel, with a total area of 2.88 m² per pack. This underlay is ideal for various flooring applications, providing a stable base.

- Panel dimensions: 120 x 60 cm
- Thickness: 9 mm
- Total area: 2.88 m² per pack

Floorfixx Regular 9 mm: 120 x 60 cm (2.88 m²)

Art. nr - 62200

Specifications

Floor type	LVT Dryback / LVT Click / Carpet tiles / Linoleum / Vinyl / LVT Rigid with underlayment
Thickness	9 mm (10% margin)
Type of base floor	Wooden floor / Fixed sand cement floor / Floating screed
Sound-reducing - ΔLlin	11 dB ΔLlin
Sound-reducing - ΔLw - Test method	EN-ISO 10140-1 - 5:2021 / EN-ISO 717-2:2013
TUV certificate	Yes
Fire classification	Bfl-s1
Product dimensions (Width)	60 cm (10% margin)
Product dimensions (Length)	120 cm (10% margin)
Product dimensions in m2	2.88 m²
Density	621 kg/m³ (10% margin)
Product weight	5590 g/m² (10% margin)
Base unit	Pack
Material	Top layer: 4 mm MDFBottom layer: 3 mm MDF & 2.2 mm XPS foam
Brand	Floorfixx
Formaldehyde class E1 (E05)	E1 (E05)
EU REACH formaldehyde emission	Complies with Annex XVII, Entry 77 (≤ 0.062 mg/m³)
Leveling capacity	3 mm over 1 m length
Thermal resistance - R-value	0.133 m² K/W

Floorfixx Regular 9 mm: 120 x 60 cm (2.88 m²)

Art. nr - 62200

Thermal resistance - Test method	ISO 8302
TOG rating	1.33 TOG
Suitable for underfloor heating	Yes
PC (Punctual Conformability)	12
CS	CS2
CS/CC (compressive Strength / Compressive Creep)	251 kPa
Domestic use	Yes
Project use	Yes
Laying method	Floating
DIBT certificate	Z-158.10-129
Bending strength (Test method: EN 310)	40 N/mm²
Wheelchair load (Test method: EN 985)	Suitable
Flame-retardant - Test method	EN 13501-1
CS/CC (Compressive Strength / Compressive Creep)	251 kPa
Hospitality Collection	Yes

Floorfixx Regular 9 mm: 120 x 60 cm (2.88 m²)

Art. nr - 62200



























