


# Floorfixx comfort 10 mm: 120 x 60 cm (2.88 m<sup>2</sup>)

Art. nr - 62210

**estillon**  
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

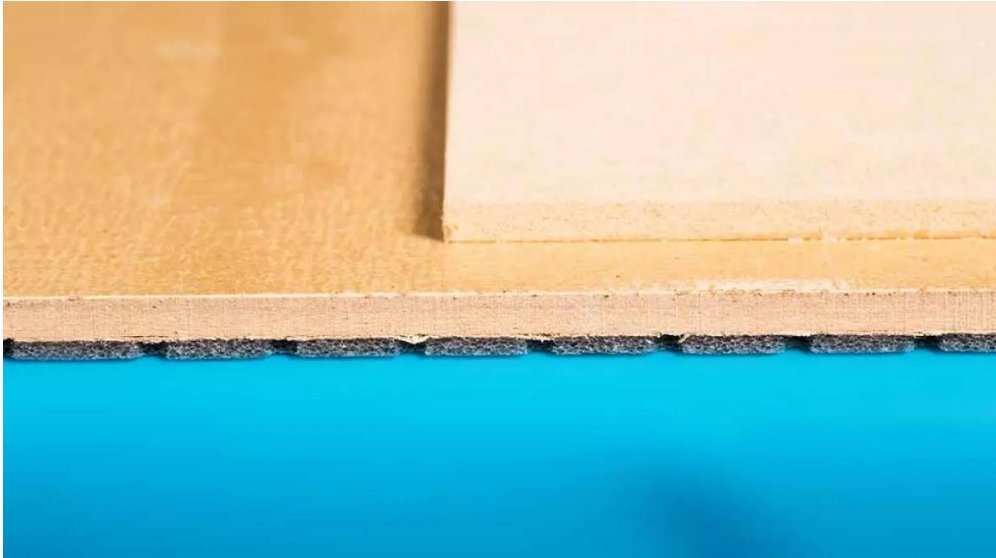

## Description

Floorfixx comfort is an innovative underlayment system that uses a sandwich system and interactive adhesive to quickly and easily create a new, insulating, even, and immediately load-bearing floor. It is perfect for renovating poor subfloors and can be used beneath overlay materials that are at least 2 mm thick, such as PVC Dryback, PVC Click, carpet tiles, linoleum, vinyl, laminate flooring, and PVC Rigid with underlayment. There are no wait or drying times, making it immediately usable. It levels unevenness up to 3 mm over one linear meter and ensures maximum stability, insulating against impact noise and meeting the 10dB standard. This system has been developed for projects where high-quality standards are required due to heavy traffic, and it is also suitable in combination with underfloor heating and cooling.

# Floorfixx comfort 10 mm: 120 x 60 cm (2.88 m<sup>2</sup>)

Art. nr - 62210

**estillon**  
WE WILL IMPROVE YOUR FLOOR

## Specifications

Floor type	PVC Dryback / PVC Click / Carpet tiles / Linoleum / Vinyl / Laminate flooring / PVC Rigid with underlayment
Base unit	Pack
Product weight	6944 g/m <sup>2</sup>
Product dimensions (Length)	120 cm
Product dimensions in m <sup>2</sup>	2.88 m <sup>2</sup>
Thickness	10 mm
Density	700 kg/m <sup>3</sup>
Material	Top layer: 4 mm MDF Bottom layer: 4 mm MDF & 2 mm perforated polyethylene
Brand	Floorfixx
Formaldehyde (Test method: EN 120)	E-1
Leveling capacity	3 mm over 1 m length
TOG rating	0.81 TOG
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
PC (Punctual Conformability)	12
CS	CS1
CS/CC (compressive Strength / Compressive Creep)	168
CS/CC (compressive Strength / Compressive Creep) - unit	kPa

# Floorfixx comfort 10 mm: 120 x 60 cm (2.88 m<sup>2</sup>)

Art. nr - 62210

**estillon**  
WE WILL IMPROVE YOUR FLOOR

Domestic use	Yes
Project use	Yes
Laying method	Floating
Product dimensions (Width)	60 cm
Product dimensions (Unit)	m <sup>2</sup>
Type of base floor	Wooden floor / Fixed sand cement floor / Floating screed
Bending strength (Test method: EN 310)	40 N/mm <sup>2</sup>
Wheelchair load (Test method: EN 985)	Suitable
Thermal resistance - R-value (Test method: ISO 8302)	0.081 m <sup>2</sup> K/W
Sound-reducing (Test method: NEN-EN ISO 717-2)	10
Sound-reducing - unit	Llin
Sound-reducing Lw (Test method: NEN-EN ISO 717-2)	20 dB Lw
Flame-retardant (Test method: EN 13501-1)	Bfl-S1
CS/CC (Compressive Strength / Compressive Creep)	168
CS/CC (Compressive Strength / Compressive Creep) - unit	kPa
Laying direction	Floorfixx comfort is installed floating using a sandwich system.
DIBT certificate	Z-158.10-129
TUV certificate	Yes

# Floorfixx comfort 10 mm: 120 x 60 cm (2.88 m<sup>2</sup>)

Art. nr - 62210

**estillon**  
WE WILL IMPROVE YOUR FLOOR

