


Solidbase Alu 2 mm: 8 x 1 m (8 m²)

Art. nr - 681351

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

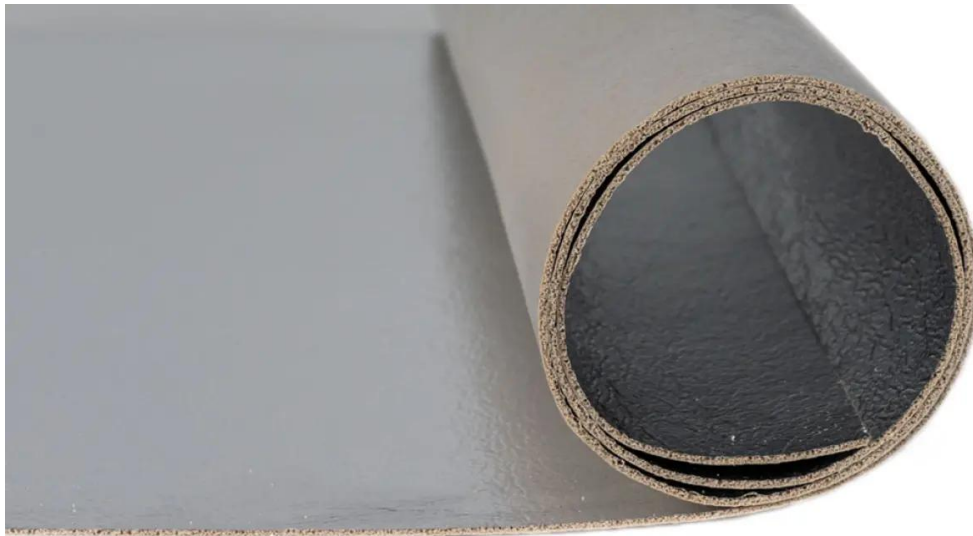

Description

Solidbase Alu 2 mm is a premium heavy underlayment made from PU and mineral fillers, featuring an integrated moisture barrier. It's suitable for both residential and project use with laminate and parquet.

- Withstands heavy loads
- Insulates impact and walking noise
- Includes an integrated moisture barrier

Solidbase Alu 2 mm: 8 x 1 m (8 m²)

Art. nr - 681351

estillon
WE WILL IMPROVE YOUR FLOOR

Specifications

Floor type	Laminate / Parquet
Thickness	2 mm
Type of base floor	Wooden floor / Fixed sand cement floor / Floating screed
Domestic use	Yes
Project use	Yes
PC (Punctual Conformability)	~ 1.15 mm
CS	CS2
CS/CC (compressive Strength / Compressive Creep)	> 200 kPa
Product weight	1600 g/m ²
Product dimensions (Length)	8 m
Product dimensions (Width)	1 m
Product dimensions in m2	8 m ²
Sound-reducing - ΔLw	18 dB ΔLw
TOG rating	0.1 TOG
Thermal resistance - R-value	0.01 m ² K/W
RWS (Radiated Walking Sound (reduction))	~ 26 %
RLB (Resistance to Large Ball)	~ 750 mm
DL (Dynamic Load)	> 2,500,000 cycles
Green choice label	Yes
DIBT certificate	Z-158.10-50

Solidbase Alu 2 mm: 8 x 1 m (8 m²)



Art. nr - 681351

Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
SD (Steam Diffusion)	>75 micron
Flame-retardant	Bfl-S1
Flame-retardant - Test method	EN ISO 9239-1: 2010
RWS (Radiated Walking Sound (reduction)) - Test Method	EPLF WD 021029-5
Density	800 kg/m ³
Material	Middle layer: PU / mineral composition Bottom layer: Vapor barrier of metallized PET film
Brand	Solidbase
Laying method	Floating
Wheelchair load (Test method: EN 985)	Suitable
CS/CC (Compressive Strength / Compressive Creep)	> 200 kPa

Solidbase Alu 2 mm: 8 x 1 m (8 m²)

Art. nr - 681351

estillon
WE WILL IMPROVE YOUR FLOOR



www.blauer-engel.de/ur156

estillon
GREEN CHOICE

