


Duralay Technics 5 mm: 11 x 1.37 m (15.07 m²)

Art. nr - 68616

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

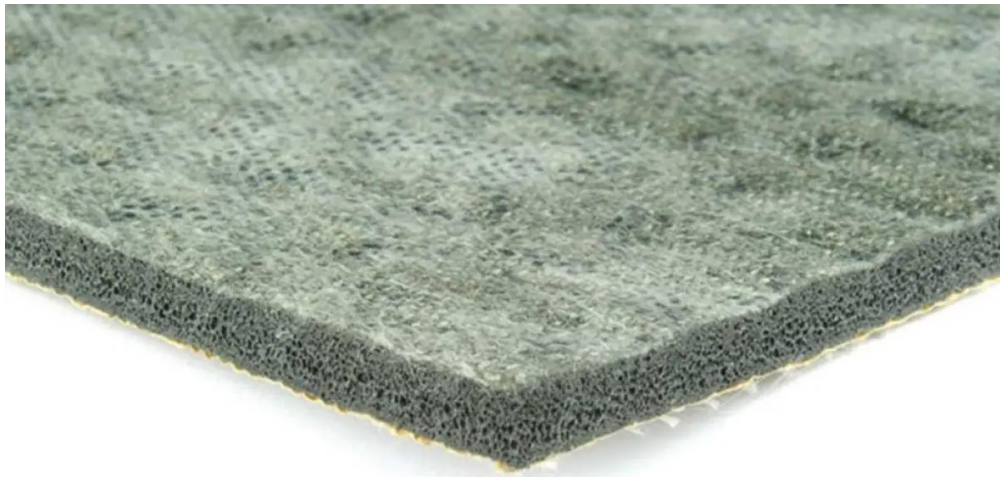

Description

Duralay Technics is a flat sponge underlay that utilizes the unique Textron® backing to provide exceptional dimensional stability, making it ideal for project use. - Suitable for the double-stick method
- Durable sponge rubber - Proven reliability for project installations

Duralay Technics 5 mm: 11 x 1.37 m (15.07 m²)

Art. nr - 68616

Specifications

Floor type	Carpet
Base unit	Roll
Product weight	2712 g/m ²
Product dimensions (Length)	11 m
Product dimensions in m2	15.07 m ²
Thickness	5 mm
Density	542.4 kg/m ³
Material	Sponge rubber
Brand	Duralay
TOG rating	0.56 TOG
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
Domestic use	Yes
Project use	Yes
Laying method	Stretch / double-sided bonding
Product dimensions (Width)	1.37 m
Product dimensions (Unit)	m ²
Type of base floor	Fixed sand cement floor / Floating screed
Thermal resistance - R-value (Test method: ISO 8302)	0.056 m ² K/W

Duralay Technics 5 mm: 11 x 1.37 m (15.07 m²)

Art. nr - 68616

Sound-reducing Lw (Test method: NEN-EN ISO 717-2)	29 dB Lw
Flame-retardant (Test method: EN 13501-1)	Bfl-S1
Laying direction	Perpendicular to the direction of the carpet. Avoid having the seams of the underlay and the carpet coincide.
Suitable for stair installation	Yes

Duralay Technics 5 mm: 11 x 1.37 m (15.07 m²)

Art. nr - 68616

estillon
WE WILL IMPROVE YOUR FLOOR

