


# PE Silver 2 mm: 15 x 1 m (15m<sup>2</sup>)

Art. nr - 68815

Scan this QR code to view this product on our website.

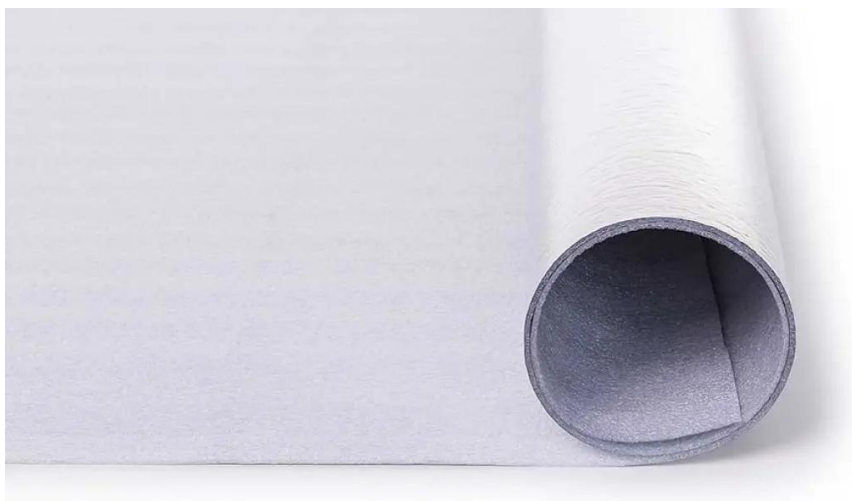

## Description

PE Silver is a PE foam laminated with a reinforced aluminum moisture barrier. PE Silver offers high compressive strength and creates a completely flat and smooth surface. It is suitable for laminate and parquet flooring for residential use. Excellent acoustic improvement Stable and easy to install Integrated vapor/moisture barrier with 50 mm flap and tape Compatible with underfloor heating

# PE Silver 2 mm: 15 x 1 m (15m<sup>2</sup>)

Art. nr - 68815

## Specifications

Floor type	Parquet / Laminate
Base unit	Roll
Product weight	40 g/m <sup>2</sup>
Product dimensions (Length)	15 m
Product dimensions in m2	15 m <sup>2</sup>
Thickness	2 mm
Density	50 kg/m <sup>3</sup>
Material	Top layer: Non-woven polyethylene flat foam Bottom layer: Metalized polypropylene 20 micron vapor/moisture barrier
Brand	Estillon
TOG rating	0.67 TOG
VOC label	A+
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
SD (Steam Diffusion)	20
SD (Steam Diffusion) - unit	micron
PC (Punctual Conformability)	> 0.5 mm
CS	CS0
CS/CC (compressive Strength / Compressive Creep)	> 10

# PE Silver 2 mm: 15 x 1 m (15m<sup>2</sup>)

Art. nr - 68815

CS/CC (compressive Strength / Compressive Creep) - unit	kPa
Domestic use	Yes
Laying method	Floating
Product dimensions (Width)	1 m
Product dimensions (Unit)	m <sup>2</sup>
Type of base floor	Fixed sand cement floor / Floating screed
Wheelchair load (Test method: EN 985)	Suitable
Thermal resistance - R-value (Test method: ISO 8302)	0.067 m <sup>2</sup> K/W
Sound-reducing Lw (Test method: NEN-EN ISO 717-2)	20 dB Lw
CS/CC (Compressive Strength / Compressive Creep)	> 10
CS/CC (Compressive Strength / Compressive Creep) - unit	kPa
Laying direction	Perpendicular to the laying direction of the upper floor. Prevent the seams of the underlay and the upper floor from coinciding.
DIBT certificate	Z-158.10-79

# PE Silver 2 mm: 15 x 1 m (15m<sup>2</sup>)

Art. nr - 68815

