


Soundstop 2 mm: 15 x 1 m (15 m²)

Art. nr - 68831

Scan this QR code to view this product on our website.

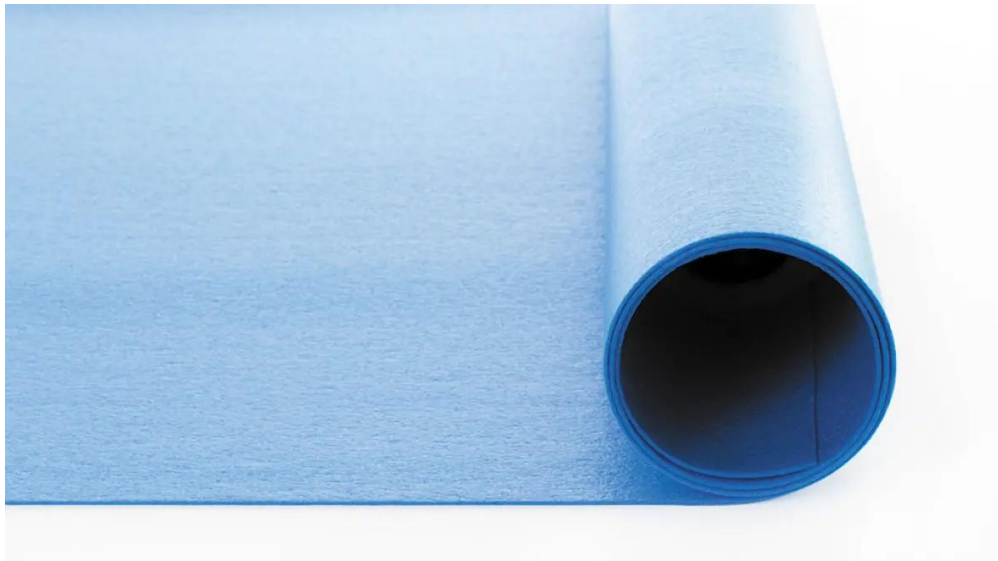

Description

Soundstop 2 mm is a PE foam that features high compressive strength and creates a flat, smooth surface for wooden floors. This product is ideal for laminate and parquet in residential settings. - Excellent contact sound insulation - Stable and easy to install - Good sound reduction - Suitable for underfloor heating

Soundstop 2 mm: 15 x 1 m (15 m²)

Art. nr - 68831

Specifications

Floor type	Parquet / Laminate
Base unit	Roll
Product weight	200 g/m ²
Product dimensions (Length)	15 m
Product dimensions in m2	15 m ²
Thickness	2 mm
Density	100 kg/m ³
Material	PE foam
Brand	Soundstop
TOG rating	0.45 TOG
VOC label	A+
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
PC (Punctual Conformability)	> 0.5 mm
CS	CS0
CS/CC (compressive Strength / Compressive Creep)	> 60
CS/CC (compressive Strength / Compressive Creep) - unit	kPa
Domestic use	Yes
Laying method	Floating

Soundstop 2 mm: 15 x 1 m (15 m²)

Art. nr - 68831

Product dimensions (Width)	1 m
Product dimensions (Unit)	m ²
Type of base floor	Fixed sand cement floor / Floating screed
Wheelchair load (Test method: EN 985)	Suitable
Thermal resistance - R-value (Test method: ISO 8302)	0.045 m ² K/W
Sound-reducing Lw (Test method: NEN-EN ISO 717-2)	18 dB Lw
Flame-retardant (Test method: EN 13501-1)	Efl-S1
CS/CC (Compressive Strength / Compressive Creep)	> 60
CS/CC (Compressive Strength / Compressive Creep) - unit	kPa
Laying direction	Perpendicular to the laying direction of the upper floor. Prevent the seams of the underlay and the upper floor from coinciding.
DIBT certificate	Z-158.10-79

Soundstop 2 mm: 15 x 1 m (15 m²)

Art. nr - 68831

