


# Soundstop 2 mm: 15 x 1 m (15 m<sup>2</sup>)

Art. nr - 68831

**estillon**  
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

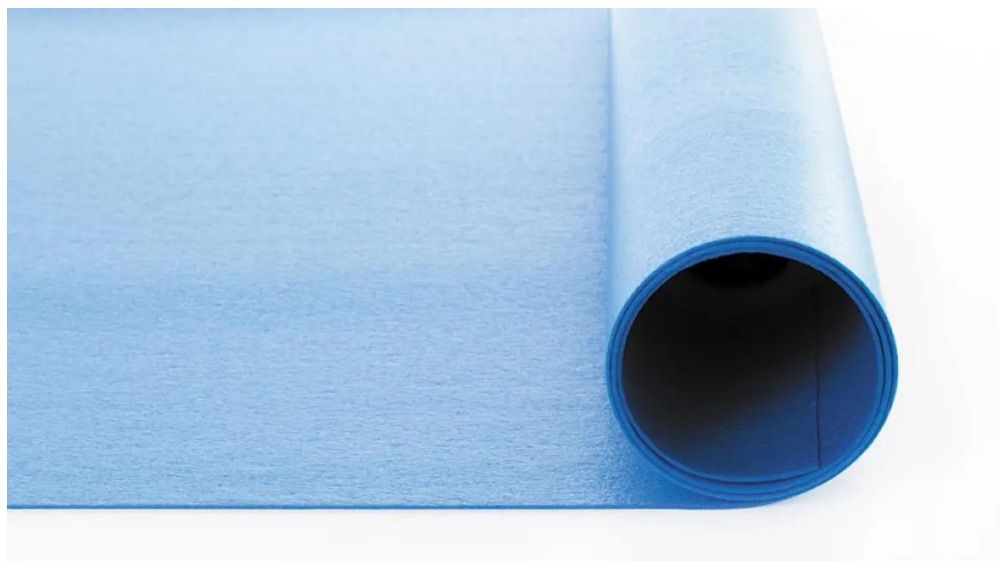

## Description

Soundstop 2 mm is a PE foam that features high compressive strength and creates a flat, smooth surface for wooden floors. This product is ideal for laminate and parquet in residential settings.

- Excellent contact sound insulation
- Stable and easy to install
- Good sound reduction
- Suitable for underfloor heating

# Soundstop 2 mm: 15 x 1 m (15 m<sup>2</sup>)

Art. nr - 68831

## Specifications

Floor type	Parquet / Laminate
Product weight	200 g/m <sup>2</sup>
Product dimensions (Length)	15 m
Product dimensions (Width)	1 m
Product dimensions in m2	15 m <sup>2</sup>
Base unit	Roll
Thickness	2 mm
Density	100 kg/m <sup>3</sup>
Material	PE foam
Brand	Soundstop
TOG rating	0.45 TOG
Thermal resistance - R-value	0.045 m <sup>2</sup> K/W
VOC label	A+
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
PC (Punctual Conformability)	> 0.5 mm
CS	CS0
CS/CC (compressive Strength / Compressive Creep)	> 60 kPa
Domestic use	Yes
Laying method	Floating
DIBT certificate	Z-158.10-79

# Soundstop 2 mm: 15 x 1 m (15 m<sup>2</sup>)


Art. nr - 68831

Type of base floor	Fixed sand cement floor / Floating screed
Wheelchair load (Test method: EN 985)	Suitable
Sound-reducing - $\Delta L_w$	18 dB $\Delta L_w$
Flame-retardant	Efl-S1
Flame-retardant - Test method	EN ISO 9239-1
CS/CC (Compressive Strength / Compressive Creep)	> 60 kPa

# Soundstop 2 mm: 15 x 1 m (15 m<sup>2</sup>)

Art. nr - 68831

**estillon**  
WE WILL IMPROVE YOUR FLOOR



Estillon BV  
Uden NL  
Soundstop 2/1/85  
Verlegersinstructie  
Bordverhalers  
DIN EN 13501-1: E-s  
(normaal ontflammend)  
Ontoestofvrij  
Bouwen met  
dier- en plantaardige

