


Soundstop 2 mm: 15 x 1 m (15 m²)

Art. nr - 68831

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

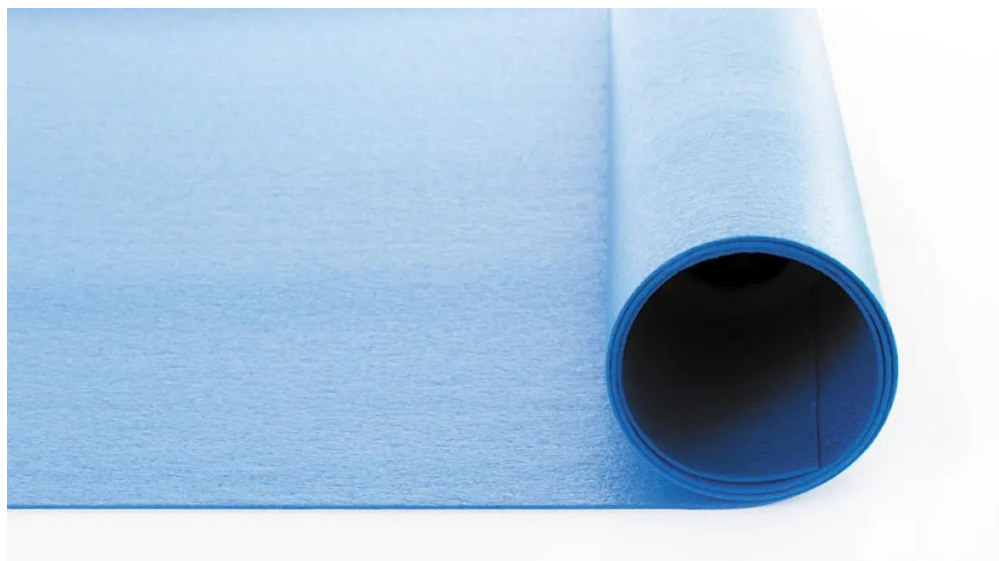

Description

Soundstop 2 mm is a PE foam that features high compressive strength and creates a flat, smooth surface for wooden floors. This product is ideal for laminate and parquet in residential settings.

- Excellent contact sound insulation
- Stable and easy to install
- Good sound reduction
- Suitable for underfloor heating

Soundstop 2 mm: 15 x 1 m (15 m²)

Art. nr - 68831

estillon
WE WILL IMPROVE YOUR FLOOR

Specifications

Floor type	Parquet / Laminate
Thickness	2 mm
Type of base floor	Fixed sand cement floor / Floating screed
Domestic use	Yes
PC (Punctual Conformability)	> 0.5 mm
CS	CS0
CS/CC (compressive Strength / Compressive Creep)	> 60 kPa
Product weight	200 g/m ²
Product dimensions (Length)	15 m
Product dimensions (Width)	1 m
Product dimensions in m ²	15 m ²
Sound-reducing - ΔL_w	18 dB ΔL_w
TOG rating	0.45 TOG
Thermal resistance - R-value	0.045 m ² K/W
DIBT certificate	Z-158.10-79
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
Flame-retardant	Efl-S1
Flame-retardant - Test method	EN ISO 9239-1
Density	100 kg/m ³
Material	PE foam

Soundstop 2 mm: 15 x 1 m (15 m²)

Art. nr - 68831

Brand	Soundstop
VOC label	A+
Laying method	Floating
Wheelchair load (Test method: EN 985)	Suitable
CS/CC (Compressive Strength / Compressive Creep)	> 60 kPa

Soundstop 2 mm: 15 x 1 m (15 m²)

Art. nr - 68831

estillon
WE WILL IMPROVE YOUR FLOOR

