


# Soundstop Plus 2 mm: 15 x 1 m (15 m<sup>2</sup>)

Art. nr - 68832

**estillon**  
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

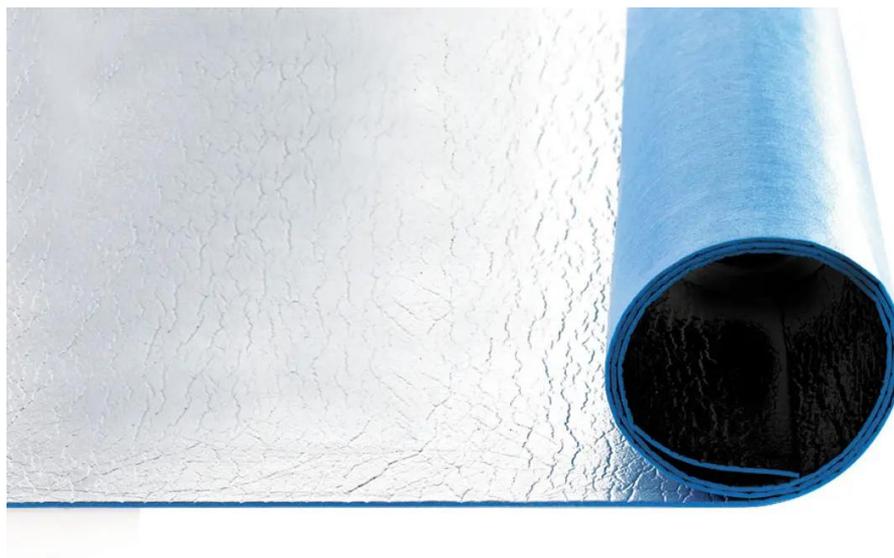

## Description

Soundstop Plus 2 mm is a PE foam with an aluminum moisture barrier. It offers high compressive strength and provides a completely flat and smooth base for wooden flooring. Suitable for laminate and parquet for both residential and project use.

- Excellent contact sound insulation
- Stable and easy to install
- Suitable for underfloor heating

# Soundstop Plus 2 mm: 15 x 1 m (15 m<sup>2</sup>)

Art. nr - 68832

**estillon**  
WE WILL IMPROVE YOUR FLOOR

## Specifications

Floor type	Parquet / Laminate
Product weight	200 g/m <sup>2</sup>
Product dimensions (Length)	15 m
Product dimensions (Width)	1 m
Product dimensions in m2	15 m <sup>2</sup>
Base unit	Roll
Thickness	2 mm
Density	100 kg/m <sup>3</sup>
Material	Top layer: PE foam Bottom layer: Moisture barrier
Brand	Soundstop
TOG rating	0.7 TOG
Thermal resistance - R-value	0.07 m <sup>2</sup> K/W
VOC label	A+
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
SD (Steam Diffusion)	>75 micron
PC (Punctual Conformability)	> 0.5 mm
CS	CS0
CS/CC (compressive Strength / Compressive Creep)	> 60 kPa
Domestic use	Yes
Laying method	Floating

# Soundstop Plus 2 mm: 15 x 1 m (15 m<sup>2</sup>)

Art. nr - 68832

DIBT certificate	Z-158.10-79
Type of base floor	Fixed sand cement floor / Floating screed
Wheelchair load (Test method: EN 985)	Suitable
Sound-reducing - $\Delta Lw$	19 dB $\Delta Lw$
Flame-retardant	Efl-S1
Flame-retardant - Test method	EN ISO 9239-1
CS/CC (Compressive Strength / Compressive Creep)	> 60 kPa

# Soundstop Plus 2 mm: 15 x 1 m (15 m<sup>2</sup>)

Art. nr - 68832

**estillon**  
WE WILL IMPROVE YOUR FLOOR

