


Whisper Black 1 mm: 10 x 1 m (10 m²)

Art. nr - 68835

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

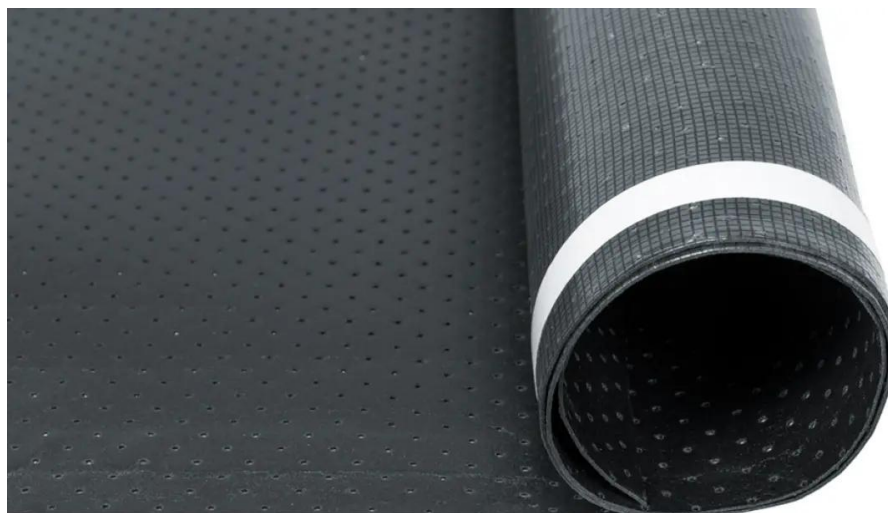

Description

Whisper Black 1 mm is a perforated foam underlayment. Suitable for the installation of laminate, parquet, and LVT rigid flooring, for residential and light project use. The 10 dB underlayment for LVT rigid flooring

- High pressure resistance to protect the click connection
- Perforated foam ideally suited for use with underfloor heating
- Overlap and self-adhesive strip for easy installation
- Outstanding sound insulation up to 12 dB ΔL_{lin} / 24 dB ΔL_w TÜV certified

Whisper Black 1 mm: 10 x 1 m (10 m²)

Art. nr - 68835

estillon
WE WILL IMPROVE YOUR FLOOR

Specifications

Floor type	Laminate / Parquet / LVT Rigid Click
Thickness	1 mm
Type of base floor	Fixed sand cement floor / Floating screed
Domestic use	Yes
Project use	Yes
PC (Punctual Conformability)	1 mm
CS	CS2
CS/CC (compressive Strength / Compressive Creep)	268 kPa
Sound-reducing - ΔL_{lin}	13 dB ΔL_{lin}
Product weight	187 g/m ²
Product dimensions (Length)	10 m
Product dimensions (Width)	1 m
Product dimensions in m ²	10 m ²
Sound-reducing - ΔL_w	24 dB ΔL_w
TOG rating	0.24 TOG
Thermal resistance - R-value	0.024 m ² K/W
TUV certificate	Yes
RWS (Radiated Walking Sound (reduction))	77.2 dB
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
Sound-reducing - ΔL_{lin} - Test method	EN-ISO 10140-1 - 5:2021 / EN-ISO 717-2:2021

Whisper Black 1 mm: 10 x 1 m (10 m²)

Art. nr - 68835

Sound-reducing - ΔL_w - Test method	EN-ISO 10140-1 - 5:2021 / EN-ISO 717-2:2021
Flame-retardant	Bfl-S1
Flame-retardant - Test method	EN ISO 9239-1
RWS (Radiated Walking Sound (reduction)) - Test Method	EN 16205
Density	187 kg/m ³
Material	PE film and foam
Brand	Whisper
Laying method	Floating
CS/CC (Compressive Strength / Compressive Creep)	268 kPa

Whisper Black 1 mm: 10 x 1 m (10 m²)

Art. nr - 68835

estillon
WE WILL IMPROVE YOUR FLOOR

