


XPS Laminate 2.2 mm: 5.1 x 1.18 m (6.018 m²)

Art. nr - 68836

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

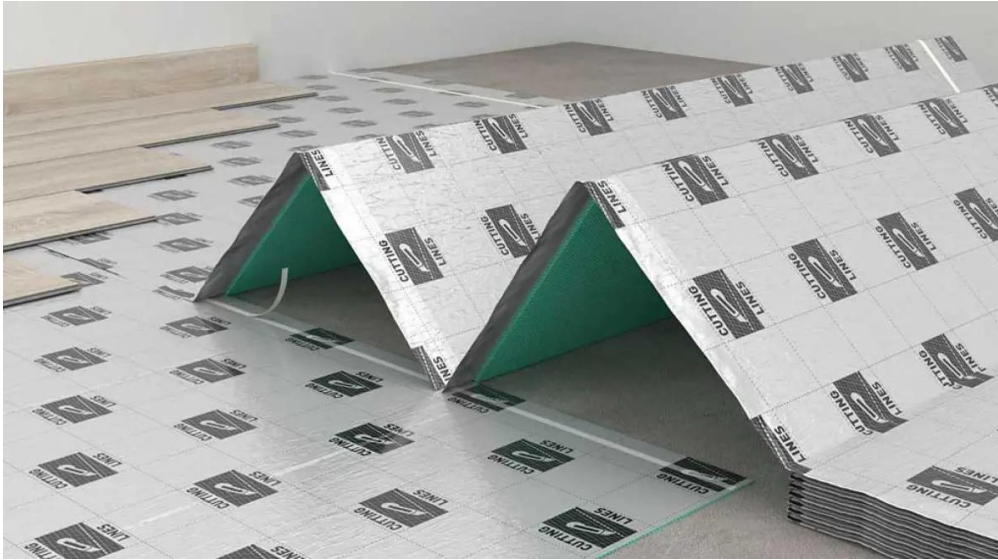

Description

XPS Laminate 2.2 mm is a high-density XPS foam with a moisture barrier. It features high compressive strength and provides a perfectly flat and smooth base for parquet and laminate. Suitable for both residential and commercial applications. It withstands high loads ($CS > 90 \text{ kPa/m}^2$). High density. Moisture barrier. Compatible with underfloor heating.

XPS Laminate 2.2 mm: 5.1 x 1.18 m (6.018 m²)

Art. nr - 68836

Specifications

Floor type	Parquet / Laminate
Base unit	Pack
Product weight	70 g/m ²
Product dimensions (Length)	5.1 m
Product dimensions in m2	7.41 m ²
Thickness	2.2 mm
Density	32 kg/m ³
Material	Xps foam / moisture barrier
Brand	Estillon
TOG rating	0.80 TOG
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
SD (Steam Diffusion)	>75
SD (Steam Diffusion) - unit	micron
PC (Punctual Conformability)	> 0.5 mm
CS	CS1
CS/CC (compressive Strength / Compressive Creep)	> 90
CS/CC (compressive Strength / Compressive Creep) - unit	kPa
Domestic use	Yes

XPS Laminate 2.2 mm: 5.1 x 1.18 m (6.018 m²)

Art. nr - 68836

Project use	Yes
Laying method	Floating
Product dimensions (Width)	1.18 m
Product dimensions (Unit)	m ²
Type of base floor	Fixed sand cement floor / Floating screed
Wheelchair load (Test method: EN 985)	Suitable
Thermal resistance - R-value (Test method: ISO 8302)	0.080 m ² K/W
Sound-reducing L _w (Test method: NEN-EN ISO 717-2)	19 dB L _w
Flame-retardant (Test method: EN 13501-1)	Efl-S1
CS/CC (Compressive Strength / Compressive Creep)	> 90
CS/CC (Compressive Strength / Compressive Creep) - unit	kPa
Laying direction	Perpendicular to the installation direction of the top floor. Avoid that the seams of the underlay and the top floor coincide.

XPS Laminate 2.2 mm: 5.1 x 1.18 m (6.018 m²)

Art. nr - 68836

estillon
WE WILL IMPROVE YOUR FLOOR

