
Solidbase SD 1.5 mm: 10 x 1 m (10 m²)

Art. nr - 688381

Scan this QR code to view this product on our website.

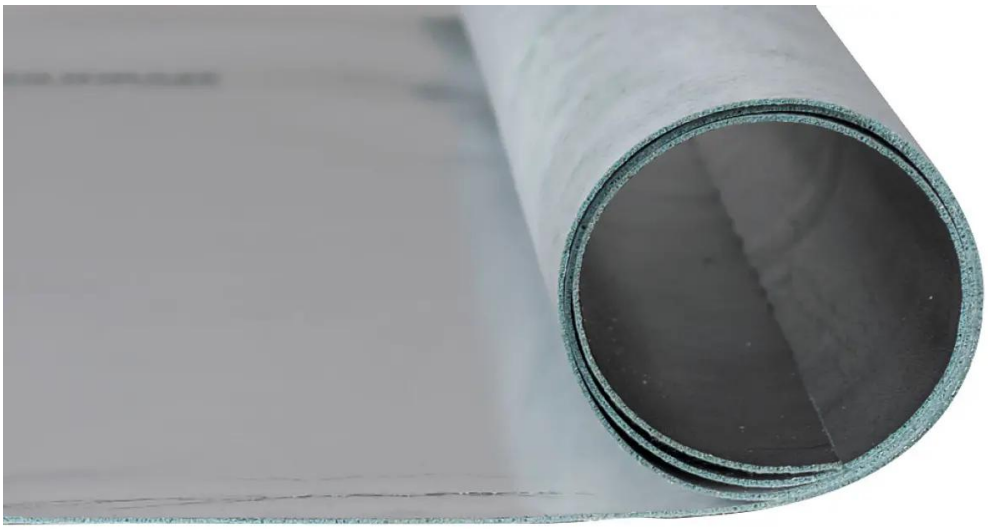

Description

High-quality heavy underlayment based on PU and mineral fillers, featuring an integrated moisture barrier. Suitable for LVT Click, laminate, and parquet for both residential and project use.

- Very high compressive strength of over 500 kPa
- Integrated vapor moisture barrier
- High SD value (vapor diffusion resistance)

Solidbase SD 1.5 mm: 10 x 1 m (10 m²)

Art. nr - 688381

Specifications

Floor type	LVT Click / Laminate / Parquet
Thickness	1.5 mm
Type of base floor	Wooden floor / Fixed sand cement floor / Floating screed
Domestic use	Yes
Project use	Yes
PC (Punctual Conformability)	~ 0.60 mm
CS	CS3
CS/CC (compressive Strength / Compressive Creep)	> 500 kPa
Product weight	1500 g/m²
Product dimensions (Length)	10 m
Product dimensions (Width)	1 m
Product dimensions in m2	10 m²
Sound-reducing - ΔLw	15 dB ΔLw
TOG rating	0.1 TOG
Thermal resistance - R-value	0.01 m² K/W
RWS (Radiated Walking Sound (reduction)	~ 22 %
RLB (Resistance to Large Ball)	~ 600 mm
DL (Dynamic Load)	> 3,000,000 cycles
Green choice label	Yes
DIBT certificate	Z-158.10-50

Solidbase SD 1.5 mm: 10 x 1 m (10 m²)

Art. nr - 688381

Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
SD (Steam Diffusion)	>75 micron
Fire classification	Bfl-s1
Flame-retardant - Test method	EN ISO 9239-1: 2010
RWS (Radiated Walking Sound (reduction)) - Test Method	EPLF WD 021029-5
Density	1000 kg/m³
Material	Middle layer: PU / mineral composition / Bottom layer: Vapor barrier of metallized PET film
Brand	Solidbase
Laying method	Floating
Wheelchair load (Test method: EN 985)	Suitable
CS/CC (Compressive Strength / Compressive Creep)	> 500 kPa

Solidbase SD 1.5 mm: 10 x 1 m (10 m²)

Art. nr - 688381











