


Solidbase SD 1,5 mm: 10 x 1 m (10 m²)

Art. nr - 688381

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

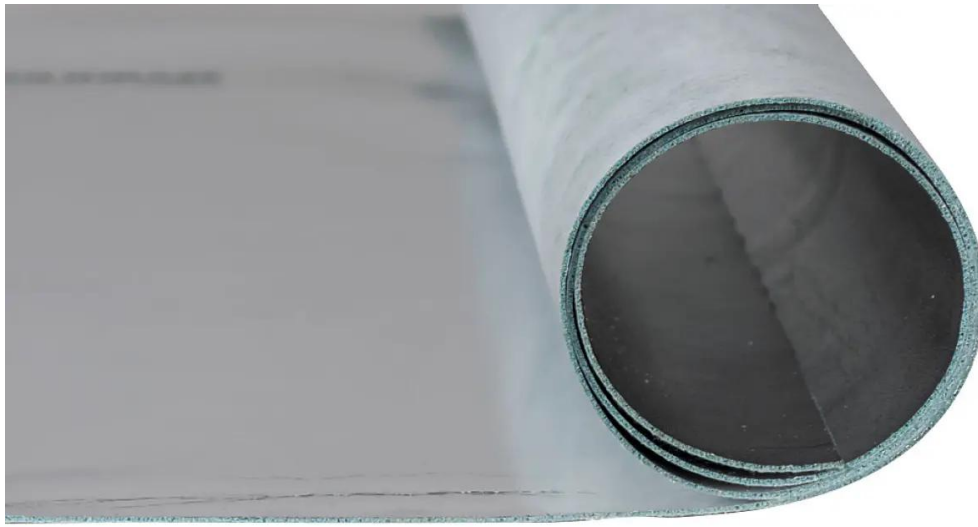

Description

High-quality heavy underlayment based on PU and mineral fillers, featuring an integrated moisture barrier. Suitable for LVT Click, laminate, and parquet for both residential and project use.

- Very high compressive strength of over 500 kPa
- Integrated vapor moisture barrier
- High SD value (vapor diffusion resistance)

Solidbase SD 1,5 mm: 10 x 1 m (10 m²)

Art. nr - 688381

Specifications

Floor type	LVT Click / Laminate / Parquet
Product weight	1500 g/m ²
Product dimensions (Length)	10 m
Product dimensions (Width)	1 m
Product dimensions in m2	10 m ²
Base unit	Roll
Thickness	1.5 mm
Density	1000 kg/m ³
Material	Middle layer: PU / mineral composition / Bottom layer: Vapor barrier of metallized PET film
Brand	Solidbase
TOG rating	0.1 TOG
Thermal resistance - R-value	0.01 m ² K/W
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
SD (Steam Diffusion)	>75 micron
PC (Punctual Conformability)	~ 0.60 mm
CS	CS3
CS/CC (compressive Strength / Compressive Creep)	> 500 kPa
Domestic use	Yes

Solidbase SD 1,5 mm: 10 x 1 m (10 m²)

Art. nr - 688381

estillon
WE WILL IMPROVE YOUR FLOOR

Project use	Yes
Laying method	Floating
DIBT certificate	Z-158.10-50
Green choice label	Yes
Type of base floor	Wooden floor / Fixed sand cement floor / Floating screed
Wheelchair load (Test method: EN 985)	Suitable
Sound-reducing - ΔL_w	15 dB ΔL_w
Flame-retardant	Bfl-S1
Flame-retardant - Test method	EN ISO 9239-1: 2010
RWS (Radiated Walking Sound (reduction))	~ 22 %
RWS (Radiated Walking Sound (reduction)) - Test Method	EPLF WD 021029-5
RLB (Resistance to Large Ball)	~ 600 mm
DL (Dynamic Load)	> 3,000,000 cycles
CS/CC (Compressive Strength / Compressive Creep)	> 500 kPa

Solidbase SD 1,5 mm: 10 x 1 m (10 m²)

Art. nr - 688381

estillon
WE WILL IMPROVE YOUR FLOOR



www.blauer-engel.de/ur156

