
Fenixbase 4 mm: 10 x 1.50 m (15 m²)

Art. nr - 71661

Scan this QR code to view this product on our website.

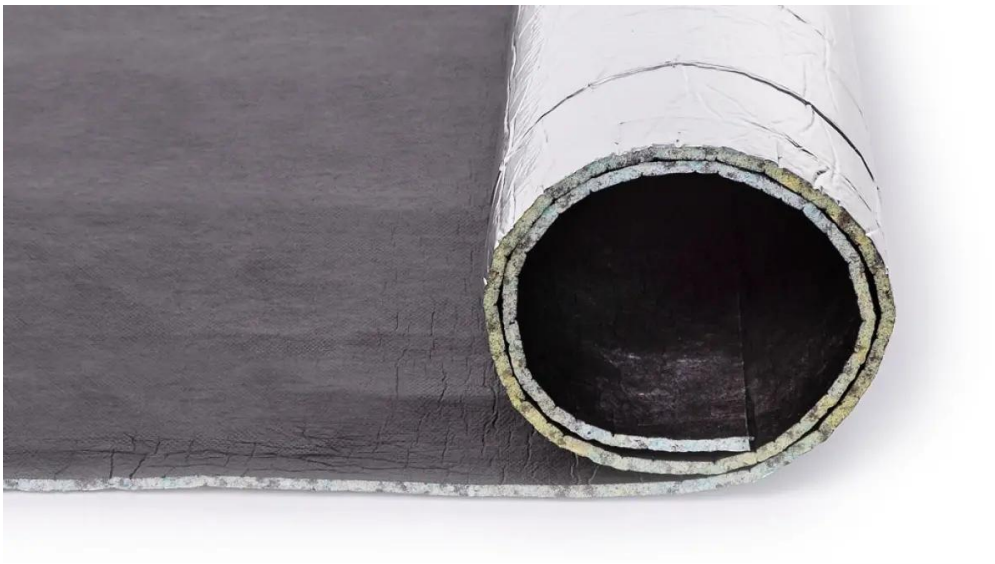

Description

Fenixbase is an underlay made from high-quality recycled polyurethane foam. The lightweight foam guarantees a stable and durable installation, enhancing the luxury and comfort of carpeting. Fenixbase is suitable for marine project applications.

- Very high resilience
- Lightweight and easy to work with
- Environmentally friendly production and 100% recycled
- IMO certified

Install with the aluminium side facing upwards for double-sided bonding and the tension-fit method

Fenixbase 4 mm: 10 x 1.50 m (15 m²)

Art. nr - 71661

Specifications

Floor type	Carpet
Thickness	4 mm (10% margin)
Product weight	560 g/m² (10% margin)
Density	140 kg/m³ (10% margin)
Type of base floor	Wooden floor / Fixed sand cement floor / Floating screed
Project use	Yes
Sound-reducing - ΔLw	27 dB ΔLw
TOG rating	1.2 TOG
Thermal resistance - R-value	0.12 m² K/W
Thermal resistance - Test method	BS 4745
Fire classification	Bfl-s1
Flame-retardant - Test method	ISO 9239-1:2002
Green choice label	Yes
Brand	Best Base
Laying method	Stretching / double-sided adhesion
Product dimensions (Length)	10 m (10% margin)
Product dimensions (Width)	1.5 m
Product dimensions in m2	15 m²

Fenixbase 4 mm: 10 x 1.50 m (15 m²)

Art. nr - 71661

Base unit	Roll
Material	Top layer: Aluminum foil Middle layer: Rebond polyurethane foam Bottom layer: Spunbond polypropylene non-woven

Fenixbase 4 mm: 10 x 1.50 m (15 m²)

Art. nr - 71661









