


Fenixbase 4 mm: 10 x 1.50 m (15 m²)

Art. nr - 71661

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

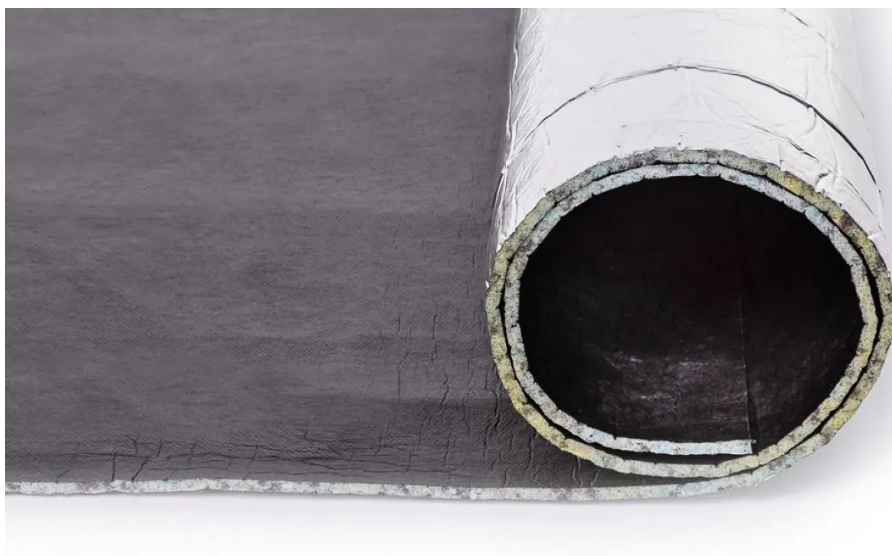

Description

Fenixbase is an underlay made from high-quality recycled polyurethane foam. The lightweight foam guarantees a stable and durable installation, enhancing the luxury and comfort of carpeting. Fenixbase is suitable for marine project applications.

- Very high resilience
- Lightweight and easy to work with
- Environmentally friendly production and 100% recycled
- IMO certified

Install with the aluminium side facing upwards for double-sided bonding and the tension-fit

Fenixbase 4 mm: 10 x 1.50 m (15 m²)

Art. nr - 71661



method

Fenixbase 4 mm: 10 x 1.50 m (15 m²)

Art. nr - 71661

Specifications

| | |
|--------------------------------------|--|
| Floor type | Carpet |
| Product weight | 560 g/m ² (10% margin) |
| Product dimensions (Length) | 10 m (10% margin) |
| Product dimensions (Width) | 1.5 m |
| Product dimensions in m ² | 15 m ² |
| Base unit | Roll |
| Thickness | 4 mm (10% margin) |
| Density | 140 kg/m ³ (10% margin) |
| Material | Top layer: Aluminum foil Middle layer: Rebond polyurethane foam Bottom layer: Spunbond polypropylene non-woven |
| Brand | Best Base |
| TOG rating | 1.2 TOG |
| Thermal resistance - R-value | 0.12 m ² K/W |
| Thermal resistance - Test method | BS 4745 |
| Project use | Yes |
| Laying method | Stretching / double-sided adhesion |
| Green choice label | Yes |
| Type of base floor | Wooden floor / Fixed sand cement floor / Floating screed |

Fenixbase 4 mm: 10 x 1.50 m (15 m²)



Art. nr - 71661

| | |
|-------------------------------|--------------------|
| Sound-reducing - ΔL_w | 27 dB ΔL_w |
| Flame-retardant | Bfl-S1 |
| Flame-retardant - Test method | ISO 9239-1:2002 |

Fenixbase 4 mm: 10 x 1.50 m (15 m²)

Art. nr - 71661

estillon
WE WILL IMPROVE YOUR FLOOR



estillon
GREEN CHOICE

