


Fenixbase 6 mm: 10 x 1.50 m (15 m²)

Art. nr - 71662

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

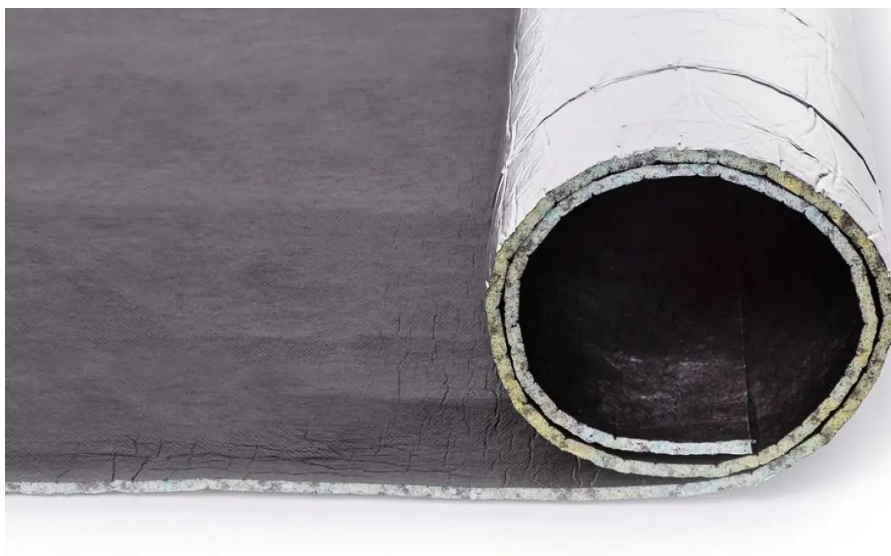

Description

Fenixbase is an underlay made from high-quality recycled polyurethane foam. Its lightweight design guarantees a stable and durable installation while enhancing the luxury and comfort of carpeting.

Fenixbase is also suitable for project marine applications. Very high recovery capability Lightweight and easy to handle Environmentally friendly production, 100% recycled IMO certified

Fenixbase 6 mm: 10 x 1.50 m (15 m²)

Art. nr - 71662

Specifications

Floor type	Carpet
Base unit	Roll
Product weight	1133 g/m ²
Product dimensions (Length)	10 m
Product dimensions in m2	15 m ²
Thickness	6 mm
Density	140 kg/m ³
Material	Top layer: Aluminum foil Middle layer: Rebond polyurethane foam Bottom layer: Spunbond polypropylene non-woven
Brand	Best Base
TOG rating	1.70 TOG
Project use	Yes
Laying method	Stretching / double-sided adhesion
Product dimensions (Width)	1.5 m
Product dimensions (Unit)	m ²
Type of base floor	Wooden floor / Fixed sand cement floor / Floating screed
Thermal resistance - R-value (Test method: ISO 8302)	0.170 m ² K/W
Sound-reducing Lw (Test method: NEN-EN ISO 717-2)	29 dB Lw
Flame-retardant (Test method: EN 13501-1)	Bfl-S1

Fenixbase 6 mm: 10 x 1.50 m (15 m²)

Art. nr - 71662

Laying direction	Perpendicular to the carpet laying direction. Prevent the seams of the underlay and the carpet from coinciding.
Suitable for stair installation	Yes
IMO certificate	Yes
Green Choice	Yes

Fenixbase 6 mm: 10 x 1.50 m (15 m²)

Art. nr - 71662

estillon
WE WILL IMPROVE YOUR FLOOR

