


Scan this QR code to view this product on our website.

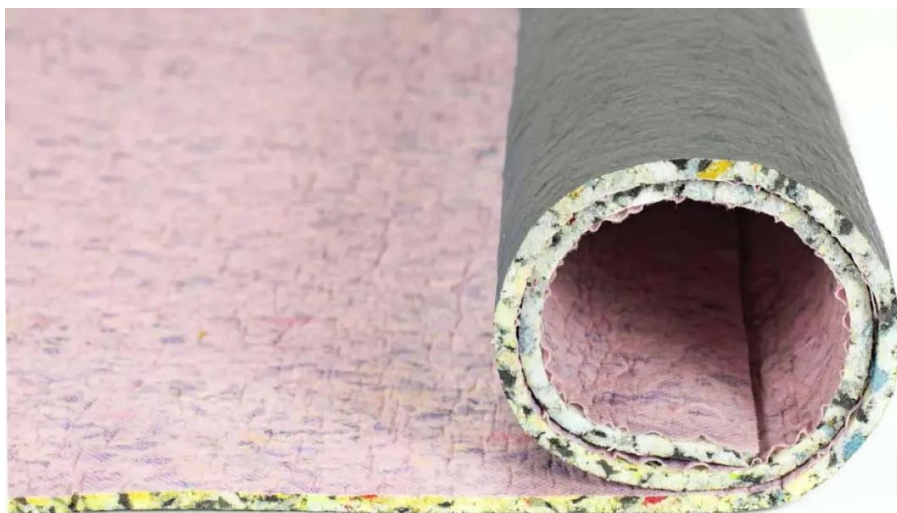

## Description

Oceanbase Contract FR is produced from high-quality recycled polyurethane foam. This lightweight foam guarantees a stable and durable installation while increasing both the luxury and comfort of the carpet. Oceanbase Contract FR is designed for marine projects.

- Very high resilience
- Lightweight and easy to install
- Environmentally friendly production and 100% recycled material
- IMO certification

Install with PP non-woven facing upwards for double-sided bonding and the tension-fit method.

## Specifications

|                                  |  |
|----------------------------------|--|
| Floor type                       | Carpet   |
| Product weight                   | 909 g/m <sup>2</sup> (10% margin)  |
| Product dimensions (Length)      | 11 m (10% margin)  |
| Product dimensions (Width)       | 1.37 m   |
| Product dimensions in m2         | 15.07 m <sup>2</sup>   |
| Base unit                        | Roll   |
| Thickness                        | 6 mm (10% margin)  |
| Density                          | 151 kg/m <sup>3</sup> (10% margin)   |
| Material                         | Top layer: Fire-retardant crepe / Middle layer: Rebond polyurethane foam / Bottom layer: PE film |
| Brand                            | Best Base  |
| TOG rating                       | 1.8 TOG  |
| Thermal resistance - R-value     | 0.18 m <sup>2</sup> K/W  |
| Thermal resistance - Test method | BS 4745  |
| Domestic use                     | Yes  |
| Project use                      | Yes  |
| Laying method                    | Stretching / double-sided adhesion   |
| IMO certificate                  | Yes  |
| Green choice label               | Yes  |
| Type of base floor               | Wooden floor / Fixed sand cement floor / Floating screed   |

# Oceanbase Contract FR 6 mm: 11 x 1,37 m (15,07 m<sup>2</sup>)

Art. nr - 71665






|                                       |                   |
|---------------------------------------|-------------------|
| Wheelchair load (Test method: EN 985) | Suitable          |
| Sound-reducing - $\Delta Lw$          | 28 dB $\Delta Lw$ |
| Flame-retardant                       | Bfl-S1            |
| Flame-retardant - Test method         | ISO 9239-1:2002   |

# Oceanbase Contract FR 6 mm: 11 x 1,37 m (15,07 m<sup>2</sup>)

Art. nr - 71665

**estillon**  
WE WILL IMPROVE YOUR FLOOR



**estillon**  
GREEN CHOICE

