
Scan this QR code to view this product on our website.

Art. nr - 114100104


Description

The Durafit system from Duralay was the first double-stick system for carpets and underlays when it was launched in the 1980s. It has since become the standard for stick-down systems and has been successfully used in thousands of contract installations of all sizes worldwide. This reliable system is ideal for areas with heavy foot traffic, ensuring a longer lifespan for carpets and maintaining their appearance. Suitable for laying both carpet and natural floor coverings using double stick and stretch fit. It is particularly suited for high-traffic spaces and compatible with swivel casters, made from highdensity recycled crumb rubber.



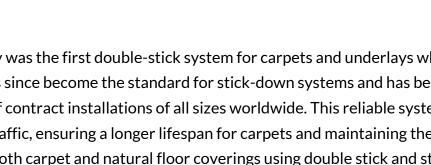





Art. nr - 114100104



Specifications

Floor type	Carpet
Base unit	Roll
Product weight	2700 g/m²
Product dimensions (Length)	11 m
Product dimensions in m2	15.07 m ²
Thickness	6.5 mm
Density	415 kg/m³
Material	Crumb rubber
Brand	Duralay
TOG rating	1.10 TOG
Suitable for underfloor heating	Yes
Domestic use	Yes
Project use	Yes
Laying method	Stretch / double-sided adhesive
Product dimensions (Width)	1.37 m
Product dimensions (Unit)	m²
Type of base floor	Wooden floor / Fixed sand cement floor / Floating screed
Thermal resistance - R-value (Test method: ISO 8302)	0.110 m² K/W
Sound-reducing Lw (Test method: NEN-EN ISO 717-2)	28 dB Lw

Art. nr - 114100104



Flame-retardant (Test method: EN 13501-1)	Cfl-S1
Laying direction	Perpendicular to the laying direction of the carpet. Avoid aligning the seams of the underlay and the carpet.
Green Choice	Yes

Art. nr - 114100104













