
Duralay LVT Multi-Fit 1.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114100111

Scan this QR code to view this product on our website.

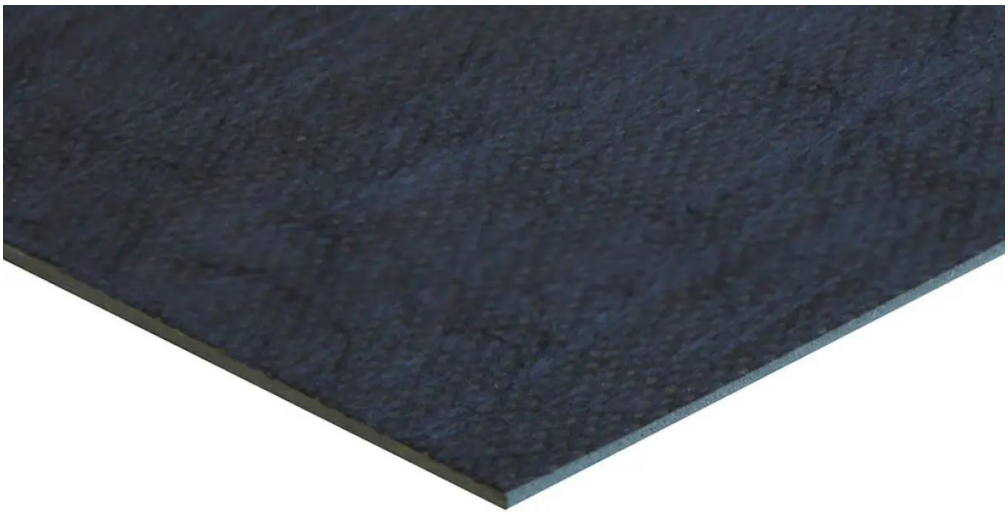

Description

The Duralay LVT Multi-Fit is a high-quality underlay with a thickness of 1.5 mm, specifically designed for LVT floors. It offers excellent support and comfort, making it ideal for both residential and commercial use.

- Suitable for LVT floors
- 1.5 mm thickness for optimal performance
- Dimensions: 7.3 x 1.37 m (10 m²)

Duralay LVT Multi-Fit 1.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114100111

Specifications

Floor type	Carpet tiles / Laminate / Parquet / LVT Dryback / LVT Click / LVT Rigid Click
Thickness	1.5 mm
Type of base floor	Fixed sand cement floor / Floating screed
Domestic use	Yes
Project use	Yes
PC (Punctual Conformability)	0.55 mm
CS	CS4
Sound-reducing - ΔLlin	10 dB ΔLlin
Product weight	2500 g/m²
Product dimensions (Length)	7.3 m
Product dimensions (Width)	1.37 m
Product dimensions in m2	10 m²
Sound-reducing - ΔLw	21 dB ΔLw
TOG rating	0.12 TOG
Thermal resistance - R-value	0.012 m² K/W
TUV certificate	Yes
RLB (Resistance to Large Ball)	1800 mm
DL (Dynamic Load)	>1000 cycles
IMO certificate	Yes
DIBT certificate	Z-158.10-260

Duralay LVT Multi-Fit 1.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114100111

Suitable for underfloor heating	Yes
Sound-reducing - ΔLlin - Test method	EN-ISO 10140-1 - 5:2021 / EN-ISO 717-2:2021
Sound-reducing - ΔLw - Test method	EN-ISO 10140-1 - 5:2021 / EN-ISO 717-2:2021
Fire classification	Bfl-s1
Density	1667 kg/m³
Material	Sponge rubber
Brand	Duralay
Laying method	Floating / double-sided gluing
CS/CC (Compressive Strength / Compressive Creep)	503 kPa
Hospitality Collection	Yes

Duralay LVT Multi-Fit 1.5 mm: 7.3 x 1.37 m (10 m²)

Art. nr - 114100111









