


# Tredaire Flamecheck 8 mm: 11 x 1.37 m (15.07 m<sup>2</sup>)

Art. nr - 114107808

**estillon**  
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

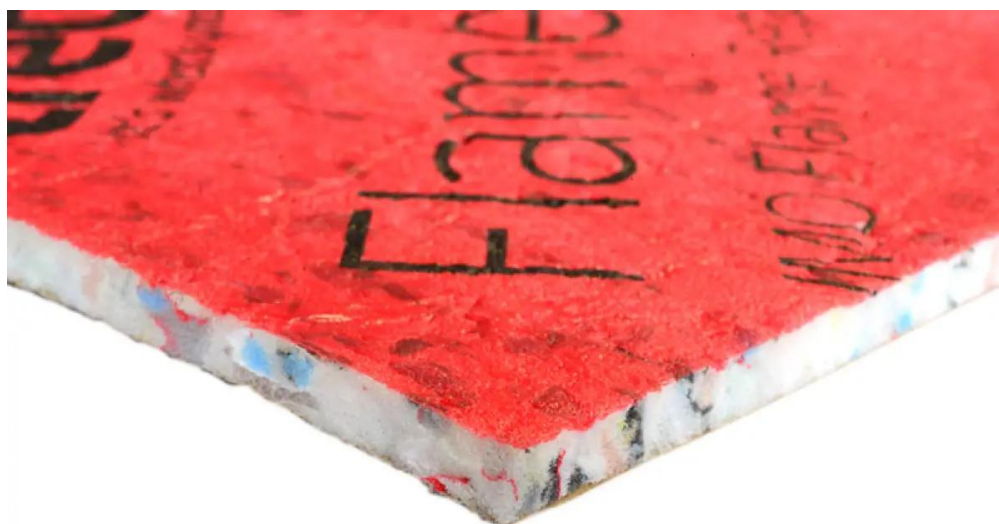

## Description

Tredaire Flamecheck is an IMO flame-retardant underlay that is ideal for seagoing vessels, offshore installations, hotels and any location where flame retardancy is a must.

**PLEASE NOTE:** In order to conform to test certification, the underlay must be fitted print side up, and adhered to the subfloor.

# Tredaire Flamecheck 8 mm: 11 x 1.37 m (15.07 m<sup>2</sup>)

Art. nr - 114107808

**estillon**  
WE WILL IMPROVE YOUR FLOOR

## Specifications

Floor type	Carpet
Product weight	1272 g/m <sup>2</sup> (10% margin)
Product dimensions (Length)	11 m (10% margin)
Product dimensions (Width)	1.37 m
Product dimensions in m <sup>2</sup>	15.07 m <sup>2</sup>
Base unit	Roll
Thickness	8 mm (10% margin)
Density	159 kg/m <sup>3</sup> (10% margin)
Material	Top layer: Red polyethylene film  Middle layer: Rebond Polyurethane foam Bottom layer: Brown flame retardant 85gsm crepe paper
Brand	Tredaire
TOG rating	1.58 TOG
Thermal resistance - R-value	0.158 m <sup>2</sup> K/W
Suitable for underfloor heating	Yes
Domestic use	Yes
Project use	Yes
Laying method	Stretching / double-sided gluing
IMO certificate	Yes

# Tredaire Flamecheck 8 mm: 11 x 1.37 m (15.07 m<sup>2</sup>)

Art. nr - 114107808






Green choice label	Yes
Type of base floor	Wooden floor / Fixed sand cement floor / Floating screed
Sound-reducing - $\Delta L_w$	32 dB $\Delta L_w$

# Tredaire Flamecheck 8 mm: 11 x 1.37 m (15.07 m<sup>2</sup>)

Art. nr - 114107808

**estillon**  
WE WILL IMPROVE YOUR FLOOR



**estillon**  
GREEN CHOICE

