
Whisper Black 1 mm: 10 x 1 m (10 m²)

Art. nr - 68835

Scan this QR code to view this product on our website.

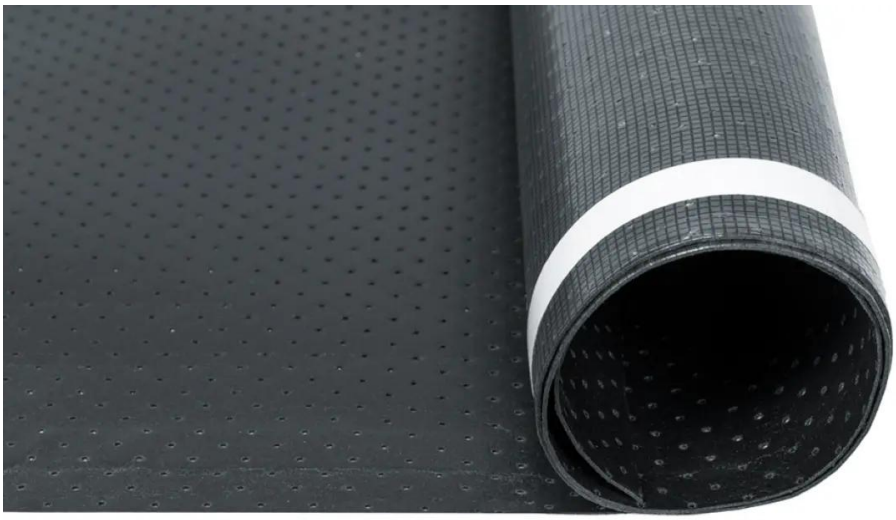

Installation instruction

- Always allow the underfloor, as well as the floor to be installed, to acclimatize in the closed packaging for at least 24 hours in the room where it will be installed.
- The ideal humidity for the installation of a PVC or parquet/laminate floor is between 50–70% and the processing temperature is 15–20 degrees Celsius.
- Ensure that the subfloor is completely free of grit, dust, and dry before installation.
- We recommend a standard trapezoid snap-off knife or a carpet knife for cutting the underfloor.
- Installation: at right angles to the laying direction of the floor covering. Ensure that the joints in the underlay and the floor covering do not coincide.
- An underfloor cannot prevent the movement of a floor.
- We advise always following the installation advice of the flooring supplier.

Whisper Black 1 mm: 10 x 1 m (10 m²)

Art. nr - 68835

Top side

Floating installation. Roll out the sheets next to each other. When laying the next sheet, place the overlap over the self-adhesive strip.

Disclaimer

If the installation instructions are not followed, Estillon cannot be held liable for damage and/or claims arising from incorrect installation. If in doubt, always consult your supplier.