


Solidbase SK 2 mm: 8 x 1 m (8 m²)

Art. nr - 681371

estillon
WE WILL IMPROVE YOUR FLOOR

Scan this QR code to view this product on our website.

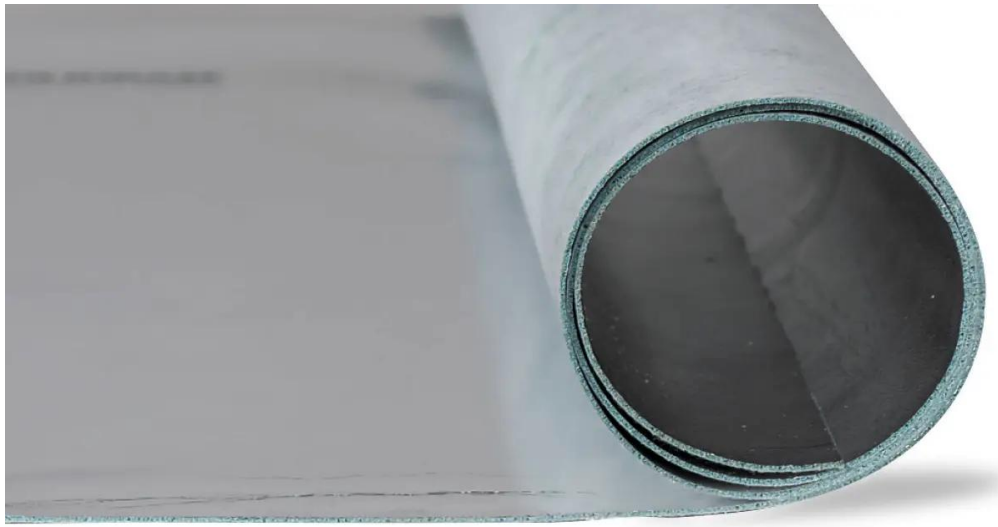

Description

Solidbase SK 2 mm is a premium heavy underlayment that boasts a compressive strength of over 400 kPa. Made from a combination of PU and mineral fillers, it features a self-adhesive surface on one side, allowing for quick installation. It is perfectly suited for both residential and project use with PVC dryback flooring. Additionally, it effectively isolates impact and walking noise.

Solidbase SK 2 mm: 8 x 1 m (8 m²)

Art. nr - 681371

Specifications

Floor type	PVC Dryback
Base unit	Roll
Product weight	2000 g/m ²
Product dimensions (Length)	8 m
Product dimensions in m ²	8 m ²
Thickness	2 mm
Density	1000 kg/m ³
Material	Middle layer: PU / mineral composition Bottom layer: Self-adhesive layer
Brand	Solidbase
TOG rating	0.10 TOG
Suitable for underfloor heating	Yes
Suitable for floor cooling	Yes
SD (Steam Diffusion)	>75
SD (Steam Diffusion) - unit	micron
PC (Punctual Conformability)	~ 0.79 mm
CS	CS3
CS/CC (compressive Strength / Compressive Creep)	>450
CS/CC (compressive Strength / Compressive Creep) - unit	kPa

Solidbase SK 2 mm: 8 x 1 m (8 m²)

Art. nr - 681371

Domestic use	Yes
Project use	Yes
Laying method	Floating
Product dimensions (Width)	1 m
Product dimensions (Unit)	m ²
Type of base floor	Wooden floor / Fixed sand cement floor / Floating screed
Thermal resistance - R-value (Test method: ISO 8302)	0.010 m ² K/W
Sound-reducing Lw (Test method: NEN-EN ISO 717-2)	16 dB Lw
Flame-retardant (Test method: EN 13501-1)	Bfl-S1
RWS (Radiated Walking Sound (reduction))	up to 7 %
RLB (Resistance to Large Ball)	~ 800 mm
DL (Dynamic Load)	> 3,000,000 cycles
CS/CC (Compressive Strength / Compressive Creep)	>450
CS/CC (Compressive Strength / Compressive Creep) - unit	kPa
Laying direction	Perpendicular to the laying direction of the top floor. Avoid aligning the seams of the undercarpet and the upper floor.
Green Choice	Yes
Blauer Engel	Yes

Solidbase SK 2 mm: 8 x 1 m (8 m²)

Art. nr - 681371

estillon
WE WILL IMPROVE YOUR FLOOR

