


Scan this QR code to view this product on our website.

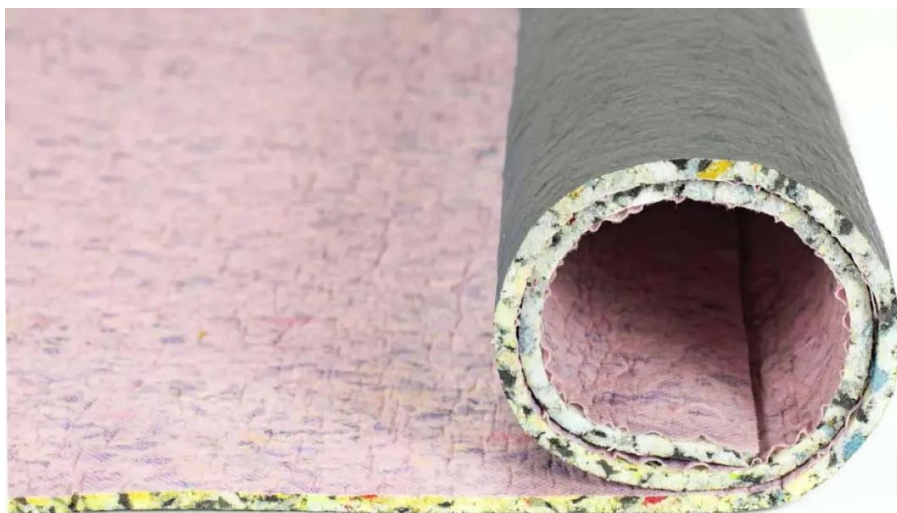

Description

Oceanbase Contract FR is produced from high-quality recycled polyurethane foam. This lightweight foam guarantees a stable and durable installation while increasing both the luxury and comfort of the carpet. Oceanbase Contract FR is designed for marine projects.

- Very high resilience
- Lightweight and easy to install
- Environmentally friendly production and 100% recycled material
- IMO certification

Install with PP non-woven facing upwards for double-sided bonding and the tension-fit method.

Specifications

Floor type	Carpet
Product weight	909 g/m ² (10% margin)
Product dimensions (Length)	11 m (10% margin)
Product dimensions (Width)	1.37 m
Product dimensions in m2	15.07 m ²
Base unit	Roll
Thickness	6 mm (10% margin)
Density	151 kg/m ³ (10% margin)
Material	Top layer: Fire-retardant crepe / Middle layer: Rebond polyurethane foam / Bottom layer: PE film
Brand	Best Base
TOG rating	1.8 TOG
Thermal resistance - R-value	0.18 m ² K/W
Thermal resistance - Test method	BS 4745
Domestic use	Yes
Project use	Yes
Laying method	Stretching / double-sided adhesion
IMO certificate	Yes
Green choice label	Yes
Type of base floor	Wooden floor / Fixed sand cement floor / Floating screed

Oceanbase Contract FR 6 mm: 11 x 1.37 m (15.07 m²)

Art. nr - 71665








Wheelchair load (Test method: EN 985)	Suitable
Sound-reducing - ΔLw	28 dB ΔLw
Flame-retardant	Bfl-S1
Flame-retardant - Test method	ISO 9239-1:2002

Oceanbase Contract FR 6 mm: 11 x 1.37 m (15.07 m²)

Art. nr - 71665

estillon
WE WILL IMPROVE YOUR FLOOR



estillon
GREEN CHOICE

